

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
20 March 2003 (20.03.2003)

PCT

(10) International Publication Number
WO 03/022392 A1

- (51) International Patent Classification⁶: **B01D 15/08**, B05D 7/00, B32B 5/16
- (74) Agents: HANLEY, Elizabeth, A. et al.; Lahive & Cockfield, LLP, 28 State Street, Boston, MA 02109 (US).
- (21) International Application Number: PCT/US02/25250
- (22) International Filing Date: 7 August 2002 (07.08.2002)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
09/924,399 7 August 2001 (07.08.2001) US
- (71) Applicant (for all designated States except US): **WATERS INVESTMENTS LIMITED** [US/US]; 109 Lukens Drive, New Castle, DE 19720 (US).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **JIANG, Zhiping** [CI/US]; 5 Sweetwood Circle, Westwood, MA 01886 (US). **FISK, Raymond, P.** [US/US]; 13 Creastwood Drive, Norton, MA 02766 (US). **O'GARA, John** [US/US]; 30 Bellview Heights, Ashland, MA 01721 (US). **WALTER, Thomas, H.** [US/US]; 54 Indian Brook Road, Ashland, MA 01721 (US). **WYNDHAM, Kevin, D.** [US/US]; 5 Royce Road, Apt 44, Allston, MA 02134 (US).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:**
— with international search report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

(54) Title: POROUS INORGANIC/ORGANIC HYBRID PARTICLES FOR CHROMATOGRAPHIC SEPARATIONS AND PROCESS FOR THEIR PREPARATION

(57) Abstract: Novel material for chromatographic separations, processes for its preparation, and separations devices containing the chromatographic material. In particular, the disclosure describes porous inorganic/organic hybrid particles having a chromatographically-enhancing pore geometry, which desirably may be surface modified, and that offer more efficient chromatographic separations than that known in the art.



WO 03/022392 A1

**POROUS INORGANIC/ORGANIC HYBRID PARTICLES FOR
CHROMATOGRAPHIC SEPARATIONS AND PROCESS FOR THEIR
PREPARATION**

5 This application claims priority to U.S. application Serial No. 09/924,399, filed August 7, 2001, which is a continuation-in-part of U.S. application Serial No. 09/858,087, filed May 14, 2001, which is a continuation of U.S. Serial No. 09/244,795, filed February 5, 1999, now abandoned. The disclosures of the aforementioned U.S. patent applications are expressly incorporated herein by reference in their entireties.

10

Background Of The Invention

 Packing materials for liquid chromatography (LC) are generally classified into two types: organic materials, *e.g.*, polydivinylbenzene, and inorganic materials typified by silica. Many organic materials are chemically stable against strongly alkaline and
15 strongly acidic mobile phases, allowing flexibility in the choice of mobile phase pH. However, organic chromatographic materials generally result in columns with low efficiency, leading to inadequate separation performance, particularly with low molecular-weight analytes. Furthermore, many organic chromatographic materials shrink and swell when the composition of the mobile phase is changed. In addition,
20 most organic chromatographic materials do not have the mechanical strength of typical chromatographic silicas.

 Due in large part to these limitations, silica is the material most widely used in High Performance Liquid Chromatography (HPLC). The most common applications employ silica that has been surface-derivatized with an organic functional group such as
25 octadecyl (C₁₈), octyl (C₈), phenyl, amino, cyano, *etc.* As stationary phases for HPLC, these packing materials result in columns that have high efficiency and do not show evidence of shrinking or swelling.

 Silica is characterized by the presence of silanol groups on its surface. During a typical derivatization process such as reaction with octadecyldimethylchlorosilane, at
30 least 50% of the surface silanol groups remain unreacted. These residual silanol groups interact with basic and acidic analytes via ion exchange, hydrogen bonding and dipole/dipole mechanisms. The residual silanol groups create problems including increased retention, excessive peak tailing and irreversible adsorption of some analytes. Another drawback with silica-based columns is their limited hydrolytic stability. First,
35 the incomplete derivatization of the silica leaves patches of bare silica surface which can be readily dissolved under alkaline conditions, generally pH>8.0, leading to the

subsequent collapse of the chromatographic bed. Secondly, the bonded phase can be stripped off the surface under acidic conditions, generally $\text{pH} < 2.0$, and eluted off the column by the mobile phase, causing loss of analyte retention, and an increase in the concentration of surface silanol groups.

5 To overcome the problems of residual silanol group activity and hydrolytic instability of silica-based stationary phases, many methods have been tried including use of ultrapure silica, carbonized silica, coating of the silica surface with polymeric materials, endcapping free silanol groups with a short-chain reagent such as trimethylsilane, and the addition of suppressors such as amines to the eluant. These
10 approaches have not proven to be completely satisfactory in practice.

One approach is disclosed in U. S. Patent No. 4,017,528. A process for preparing a "hybrid" silica is described wherein an alkyl functionality is coupled into both the skeleton structure and the surface of the silica. According to the '528 patent, the hybrid silica can be prepared by two methods. In the first method, a mixture of
15 tetraethoxysilane (TEOS) and an organotriethoxysilane, *e.g.*, alkyltriethoxysilane, is co-hydrolyzed in the presence of an acid catalyst to form a liquid material containing polyorganoethoxysiloxane (POS) oligomers, *e.g.*, polyalkylethoxysiloxane oligomers. Then, the POS is suspended in an aqueous medium and gelled into porous particles in the presence of a base catalyst. In the second method, the material is prepared by a
20 similar procedure except that the suspension droplet is a mixture of organotriethoxysilane, *e.g.*, alkyltriethoxysilane, and polyethoxysiloxane (PES) oligomers; the latter is prepared by partial hydrolysis of TEOS.

There are several problems associated with the '528 hybrid material. First, these hybrid materials contain numerous micropores, *i.e.*, pores having a diameter below 34 Å.
25 It is known that such micropores inhibit solute mass transfer, resulting in poor peak shape and band broadening.

Second, the pore structure of the '528 hybrid material is formed because of the presence of ethanol (a side product of the gelation process) within the suspension oil droplets. The pore volume is controlled by the molecular weight of the POS or PES.
30 The lower the molecular weight of the POS or PES, the more ethanol is generated during the gelation reaction, and subsequently a larger pore volume is produced. However, part of the ethanol generated during the gelation is able to diffuse into the aqueous phase by partition. If the amount of the ethanol generated within the suspension droplets is too great, the partition of the ethanol will cause the structure of the droplets to collapse,
35 forming irregularly-shaped particles as opposed to spherical particles. Therefore, the strategy to control the pore volume of the hybrid material described in the '528 patent has certain limitations, particularly for preparing highly spherical hybrid materials with a

pore volume greater than about $0.8 \text{ cm}^3/\text{g}$. It is well known in the art that irregularly-shaped materials are generally more difficult to pack than spherical materials. It is also known that columns packed with irregularly-shaped materials generally exhibit poorer packed bed stability than spherical materials of the same size.

5 Thirdly, the '528 hybrid materials are characterized by an inhomogeneous particle morphology, which contributes to undesirable chromatographic properties, including poor mass transfer properties for solute molecules. This is a consequence of the gelation mechanism, where the base catalyst reacts rapidly near the surface of the POS droplet, forming a "skinned" layer having very small pores. Further gelation in
10 the interior of the droplet is then limited by the diffusion of catalyst through this outer layer towards the droplet center, leading to particles having skeletal morphologies and hence pore geometries, *e.g.*, "shell shaped", which can vary as a function of location between the particle center and outer layer.

15 Summary Of The Invention

The present invention relates to a novel material for chromatographic separations, processes for its preparation, and separations devices containing the chromatographic material. In particular, one aspect of the invention is a porous inorganic/organic hybrid material, comprising porous inorganic/organic hybrid particles
20 having a chromatographically-enhancing pore geometry.

Another aspect of the invention is a porous inorganic/organic hybrid material, comprising porous inorganic/organic hybrid particles having a chromatographically-enhancing pore geometry. The particles are surface modified with a surface modifier having the formula $Z_a(R')_b\text{Si-R}$, where $Z = \text{Cl, Br, I, C}_1 - \text{C}_5 \text{ alkoxy, dialkylamino or trifluoromethanesulfonate}$; a and b are each an integer from 0 to 3 provided that $a + b = 3$; R' is a $\text{C}_1 - \text{C}_6$ straight, cyclic or branched alkyl group, and R is a functionalizing
25 group.

An additional aspect of the invention is a method of preparation of porous inorganic/organic hybrid particles having a chromatographically-enhancing pore
30 geometry, comprising the steps of

- a) forming porous inorganic/organic hybrid particles,
- b) modifying the pore structure of said porous particles.

In another aspect of the invention, the invention is a method of preparation of porous inorganic/organic hybrid particles having a chromatographically-enhancing pore
35 geometry, comprising the steps of

- a) forming porous inorganic/organic hybrid particles,
- b) modifying the pore structure of the porous particles, and
- c) surface modifying the porous particles

5 wherein the surface modification step includes surface modifying the porous particles with a surface modifier having the formula $Z_a(R')_bSi-R$, where $Z = Cl, Br, I, C_1 - C_5$ alkoxy, dialkylamino or trifluoromethanesulfonate; a and b are each an integer from 0 to 3 provided that $a + b = 3$; R' is a $C_1 - C_6$ straight, cyclic or branched alkyl group, and R is a functionalizing group.

10 Yet another aspect of the invention is a separations device having a stationary phase comprising porous inorganic/organic hybrid particles having a chromatographically-enhancing pore geometry.

Another aspect of the invention is a separations device having a stationary phase comprising porous inorganic/organic hybrid particles having a chromatographically-
 15 enhancing pore geometry, wherein the particles have been surface modified with a surface modifier having the formula $Z_a(R')_bSi-R$, where $Z = Cl, Br, I, C_1 - C_5$ alkoxy, dialkylamino or trifluoromethanesulfonate; a and b are each an integer from 0 to 3 provided that $a + b = 3$; R' is a $C_1 - C_6$ straight, cyclic or branched alkyl group, and R is a functionalizing group.

20 In yet another aspect, the invention is a chromatographic column having improved lifetime, comprising

- a) a column having a cylindrical interior for accepting a packing material, and
- b) a packed chromatographic bed comprising porous inorganic/organic hybrid particles having a chromatographically-enhancing pore geometry of the
 25 formula $SiO_2/(R^2_p R^4_q SiO_t)_n$ or $SiO_2/[R^6(R^2_r SiO_t)_m]_n$ wherein R^2 and R^4 are independently $C_1 - C_{18}$ aliphatic or aromatic moieties, R^6 is a substituted or unsubstituted $C_1 - C_{18}$ alkylene, alkenylene, alkynylene or arylene moiety bridging two or more silicon atoms, p and q are 0, 1 or 2, provided that $p+q =$
 30 1 or 2, and that when $p+q=1$, $t=1.5$, and when $p+q=2$, $t=1$; r is 0 or 1, provided that when $r = 0$, $t = 1.5$, and when $r = 1$, $t = 1$; m is an integer greater than or equal to 2, and n is a number from 0.03 to 1, said porous hybrid silica chromatographic matrix having a chromatographically-enhancing pore geometry and average pore diameters of about 100 to 300 Å, and said porous particles of hybrid silica have been surface modified.

35 In yet another aspect, the invention is a chromatographic column having improved lifetime, comprising

- 5 a) a column having a cylindrical interior for accepting a packing material, and
b) a packed chromatographic bed comprising porous inorganic/organic hybrid particles having a chromatographically-enhancing pore geometry that have been surface modified with a surface modifier having the formula $Z_a(R')_bSi-R$, where $Z = Cl, Br, I, C_1 - C_5$ alkoxy, dialkylamino or trifluoromethanesulfonate; a and b are each an integer from 0 to 3 provided that $a + b = 3$; R' is a $C_1 - C_6$ straight, cyclic or branched alkyl group, and R is a functionalizing group.

10 Another aspect of the invention is a method of preparation of porous particles of hybrid silica having a chromatographically-enhancing pore geometry, comprising the steps of

- 15 a) prepolymerizing a mixture of one or more organoalkoxysilanes and a tetraalkoxysilane in the presence of an acid catalyst to produce a polyorganoalkoxysiloxane;
b) preparing an aqueous suspension of said polyorganoalkoxysiloxane, said suspension further comprising a surfactant or combination of surfactants, and gelling in the presence of a base catalyst so as to produce porous particles; and
20 c) modifying the pore structure of said porous particles by hydrothermal treatment,

thereby preparing porous particles of hybrid silica having a chromatographically-enhancing pore geometry.

25 In an additional aspect, the invention is a porous particle of hybrid silica having a chromatographically-enhancing pore geometry, produced by the process of

- 30 a) prepolymerizing a mixture of one or more organoalkoxysilanes and a tetraalkoxysilane in the presence of an acid catalyst to produce a polyorganoalkoxysiloxane;
b) preparing an aqueous suspension of said polyorganoalkoxysiloxane, said suspension further comprising a surfactant or a combination of surfactants, and gelling in the presence of an base catalyst so as to produce porous particles; and
c) modifying the pore structure of said porous particles by hydrothermal treatment,

35 thereby producing porous particles of hybrid silica having a chromatographically-enhancing pore geometry.

Another aspect of the invention is a porous inorganic/organic hybrid material, comprising porous inorganic/organic hybrid particles having a chromatographically-enhancing pore geometry, wherein said particles have a micropore surface area ranging from less than about 110 m²/g to less than about 50 m²/g.

- 5 Another aspect of the invention is a porous inorganic/organic hybrid material, comprising porous inorganic/organic hybrid particles having a chromatographically-enhancing pore geometry, and having the formula $\text{SiO}_2/(\text{R}_p^2\text{R}_q^4\text{SiO}_t)_n$ or $\text{SiO}_2/[\text{R}_r^6(\text{R}_t^2\text{SiO}_t)_m]_n$ wherein R^2 and R^4 are independently $\text{C}_1 - \text{C}_{18}$ aliphatic, styryl, vinyl, propanol, or aromatic moieties, R^6 is a substituted or unsubstituted $\text{C}_1 - \text{C}_{18}$ alkylene, alkenylene, alkynylene or arylene moiety bridging two or more silicon atoms, p and q are 0, 1 or 2, provided that $p+q = 1$ or 2, and that when $p+q=1$, $t=1.5$, and when $p+q=2$, $t=1$; r is 0 or 1, provided that when $r = 0$, $t = 1.5$, and when $r = 1$, $t = 1$; m is an integer greater than or equal to 2, and n is a number from 0.03 to 1.

- 15 Yet another aspect of the invention is a method of preparation of porous inorganic/organic hybrid particles having a chromatographically-enhancing pore geometry, comprising the steps of

- a) forming porous inorganic/organic hybrid particles,
- b) modifying the pore structure of said porous particles,

- 20 wherein said particles have a micropore surface area ranging from less than about 110 m²/g to less than about 50 m²/g.

In an additional aspect, the invention is a method of preparation of porous inorganic/organic hybrid particles having a chromatographically-enhancing pore geometry, comprising the steps of

- a) forming porous inorganic/organic hybrid particles,
- 25 b) modifying the pore structure of said porous particles, and
- c) surface modifying said particles,

wherein said particles have been surface modified by a surface modifier selected from the group consisting of an organic group surface modifier, a silanol group surface modifier, a polymeric coating surface modifier, and combinations thereof.

- 30 Another aspect of the invention is a separations device having a stationary phase comprising porous inorganic/organic hybrid particles having a chromatographically-enhancing pore geometry, wherein said particles have a micropore surface ranging from less than about 110 m²/g to less than about 50 m²/g.

Another aspect of the invention is a separations device having a stationary phase comprising porous inorganic/organic hybrid particles having a chromatographically-enhancing pore geometry, wherein the particles have been surface modified with a surface modifier having the formula $Z_a(R')_bSi-R$, where $Z = Cl, Br, I, C_1 - C_5$ alkoxy, dialkylamino or trifluoromethanesulfonate; a and b are each an integer from 0 to 3 provided that $a + b = 3$; R' is a $C_1 - C_6$ straight, cyclic or branched alkyl group, and R is a functionalizing group, wherein said particles have a micropore surface area ranging from less than about $110 \text{ m}^2/\text{g}$ to less than about $50 \text{ m}^2/\text{g}$.

In yet another aspect, the invention is chromatographic column having improved lifetime, comprising

- a) a column having a cylindrical interior for accepting a packing material, and
- b) a packed chromatographic bed comprising porous inorganic/organic hybrid particles having a chromatographically-enhancing pore geometry of the formula $SiO_2/(R^2_p R^4_q SiO_t)_n$ or $SiO_2/[R^6(R^2_r SiO_t)_m]_n$ wherein R^2 and R^4 are independently $C_1 - C_{18}$ aliphatic, styryl, vinyl, propanol, or aromatic moieties, R^6 is a substituted or unsubstituted $C_1 - C_{18}$ alkylene, alkenylene, alkynylene or arylene moiety bridging two or more silicon atoms, p and q are 0, 1 or 2, provided that $p+q = 1$ or 2, and that when $p+q=1$, $t=1.5$, and when $p+q=2$, $t=1$; r is 0 or 1, provided that when $r = 0$, $t = 1.5$, and when $r = 1$, $t = 1$; m is an integer greater than or equal to 2, and n is a number from 0.03 to 1, said porous hybrid silica chromatographic matrix having a chromatographically-enhancing pore geometry and average pore diameters of about 100 to 300 Å, and said porous particles of hybrid silica have been surface modified.

Another aspect of the invention is a chromatographic column having improved lifetime, comprising

- a) a column having a cylindrical interior for accepting a packing material, and
- b) a packed chromatographic bed comprising porous inorganic/organic hybrid particles having a chromatographically-enhancing pore geometry wherein said particles have been surface modified by a surface modifier selected from the group consisting of an organic group surface modifier, a silanol group surface modifier, a polymeric coating surface modifier, and combinations thereof.

Another aspect of the invention is a method of preparation of porous particles of hybrid silica having a chromatographically-enhancing pore geometry, comprising the steps of

- a) prepolymerizing a mixture of one or more organoalkoxysilanes and a tetraalkoxysilane in the presence of an acid catalyst to produce a polyorganoalkoxysiloxane;
- b) preparing an aqueous suspension of said polyorganoalkoxysiloxane, said suspension further comprising a surfactant or combination of surfactants, and gelling in the presence of a base catalyst so as to produce porous particles; and
- c) modifying the pore structure of said porous particles by hydrothermal treatment,
- thereby preparing porous particles of hybrid silica having a chromatographically-enhancing pore geometry.

Another aspect of the invention is directed to porous particles of hybrid silica having a chromatographically-enhancing pore geometry, produced by the process of

- a) prepolymerizing a mixture of one or more organoalkoxysilanes and a tetraalkoxysilane in the presence of an acid catalyst to produce a polyalkyloxysiloxane;
- b) preparing an aqueous suspension of said polyalkyloxysiloxane, said suspension further comprising a surfactant or a combination of surfactants, and gelling in the presence of a base catalyst so as to produce porous particles; and
- c) modifying the pore structure of said porous particles by hydrothermal treatment,

thereby producing porous particles of hybrid silica having a chromatographically-enhancing pore geometry.

- In another aspect, the invention is directed to a porous inorganic/organic hybrid material, comprising a chromatographically-enhancing pore geometry.

Yet another aspect of the invention is a porous inorganic/organic hybrid material, wherein pores of a diameter of less than about 34Å contribute less than about 110 m²/g to less than about 50 m²/g to the specific surface area of the material.

Detailed Description Of The Invention

The present invention will be more fully illustrated by reference to the definitions set forth below.

- The language "chromatographically-enhancing pore geometry" includes the geometry of the pore configuration of the presently-disclosed porous inorganic/organic hybrid particles, which has been found to enhance the chromatographic separation ability of the material, *e.g.*, as distinguished from other chromatographic media in the

art. For example, a geometry can be formed, selected or constructed, and various properties and/or factors can be used to determine whether the chromatographic separations ability of the material has been “enhanced”, *e.g.*, as compared to a geometry known or conventionally used in the art. Examples of these factors include high
 5 separation efficiency, longer column life, and high mass transfer properties (as evidenced by, *e.g.*, reduced band spreading and good peak shape.) These properties can be measured or observed using art-recognized techniques. For example, the chromatographically-enhancing pore geometry of the present porous inorganic/organic hybrid particles is distinguished from the prior art particles by the absence of “ink
 10 bottle” or “shell shaped” pore geometry or morphology, both of which are undesirable because they, *e.g.*, reduce mass transfer rates, leading to lower efficiencies.

Chromatographically-enhancing pore geometry is found in hybrid particles containing only a small population of micropores and a sufficient population of mesopores. A small population of micropores is achieved in hybrid particles when all
 15 pores of a diameter of about $< 34 \text{ \AA}$ contribute less than about $110 \text{ m}^2/\text{g}$ to the specific surface area of the particle. Hybrid materials with such a low micropore surface area give chromatographic enhancements including high separation efficiency and good mass transfer properties (as evidenced by, *e.g.*, reduced band spreading and good peak shape). Micropore surface area is defined as the surface area in pores with diameters less than or
 20 equal to 34 \AA , determined by multipoint nitrogen sorption analysis from the adsorption leg of the isotherm using the BJH method.

A sufficient population of mesopores is achieved in hybrid materials when all pores of a diameter of about 35 \AA to about 500 \AA , *e.g.*, preferably about 60 \AA to about 500 \AA , *e.g.*, even more preferably about 100 \AA to about 300 \AA , sufficiently contribute to
 25 the specific surface area of the material, *e.g.*, to about 35 to about $750 \text{ m}^2/\text{g}$, *e.g.*, preferably about 65 - $550 \text{ m}^2/\text{g}$, *e.g.*, even more preferably about 100 to $350 \text{ m}^2/\text{g}$ to the specific surface area of the material.

“Hybrid”, *i.e.*, as in “porous inorganic/organic hybrid particles” includes inorganic-based structures wherein an organic functionality is integral to both the
 30 internal or “skeletal” inorganic structure as well as the hybrid material surface. The inorganic portion of the hybrid material may be, *e.g.*, alumina, silica, titanium or zirconium oxides, or ceramic material; in a preferred embodiment, the inorganic portion of the hybrid material is silica. In a preferred embodiment where the inorganic portion is silica, “hybrid silica” refers to a material having the formula $\text{SiO}_2/(\text{R}^2_p \text{R}^4_q \text{SiO}_t)_n$ or
 35 $\text{SiO}_2/[\text{R}^6(\text{R}^2_r \text{SiO}_t)_m]_n$ wherein R^2 and R^4 are independently $\text{C}_1 - \text{C}_{18}$ aliphatic or aromatic moieties (which may additionally be substituted with alkyl, aryl, cyano, amino, hydroxyl, diol, nitro, ester, ion exchange or embedded polar functionalities), R^6 is a substituted or unsubstituted $\text{C}_1 - \text{C}_{18}$ alkylene, alkenylene, alkynylene or arylene moiety

bridging two or more silicon atoms, p and q are 0, 1 or 2, provided that $p+q = 1$ or 2, and that when $p+q=1$, $t=1.5$, and when $p+q=2$, $t=1$; r is 0 or 1, provided that when $r = 0$, $t = 1.5$, and when $r = 1$, $t = 1$; m is an integer greater than or equal to 2, and n is a number from 0.03 to 1, more preferably, 0.1 to 1, and even more preferably 0.2 to 0.5. R^2 may
5 be additionally substituted with a functionalizing group R.


The term "functionalizing group" includes organic functional groups which impart a certain chromatographic functionality to a chromatographic stationary phase, including, *e.g.*, octadecyl (C_{18}) or phenyl. Such functionalizing groups are present in, *e.g.*, surface modifiers such as disclosed herein which are attached to the base material,
10 *e.g.*, via derivatization or coating and later crosslinking, imparting the chemical character of the surface modifier to the base material. In an embodiment, such surface modifiers have the formula $Z_a(R')_bSi-R$, where $Z = Cl, Br, I, C_1 - C_5$ alkoxy, dialkylamino, *e.g.*, dimethylamino, or trifluoromethanesulfonate; a and b are each an integer from 0 to 3 provided that $a + b = 3$; R' is a $C_1 - C_6$ straight, cyclic or branched alkyl group, and R is
15 a functionalizing group. R' may be, *e.g.*, methyl, ethyl, propyl, isopropyl, butyl, t-butyl, sec-butyl, pentyl, isopentyl, hexyl or cyclohexyl; preferably, R' is methyl.

The porous inorganic/organic hybrid particles possess both organic groups and silanol groups which may additionally be substituted or derivatized with a surface modifier. "Surface modifiers" include (typically) organic functional groups which
20 impart a certain chromatographic functionality to a chromatographic stationary phase. Surface modifiers such as disclosed herein are attached to the base material, *e.g.*, via derivatization or coating and later crosslinking, imparting the chemical character of the surface modifier to the base material. In particular, the organic groups of the hybrid particle react to form an organic covalent bond with a surface modifier. The modifiers
25 can form an organic covalent bond to the particle's organic group via a number of mechanisms well known in organic and polymer chemistry including but not limited to nucleophilic, electrophilic, cycloaddition, free-radical, carbene, nitrene, and carbocation reactions. Organic covalent bonds are defined to involve the formation of a covalent bond between the common elements of organic chemistry including but not limited to
30 hydrogen, boron, carbon, nitrogen, oxygen, silicon, phosphorus, sulfur, and the halogens. In addition, carbon-silicon and carbon-oxygen-silicon bonds are defined as organic covalent bonds, whereas silicon-oxygen-silicon bonds that are not defined as organic covalent bonds.


In general, the porous inorganic/organic hybrid particles can be modified by an organic
35 group surface modifier, a silanol group surface modifier, a polymeric coating surface modifier, and combinations of the aforementioned surface modifiers.

For example, the silanol groups of the hybrid particles can be surface modified with compounds having the formula $Z_a(R')_bSi-R$, where $Z = Cl, Br, I, C_1 - C_5$ alkoxy, dialkylamino, *e.g.*, dimethylamino, or trifluoromethanesulfonate; a and b are each an integer from 0 to 3 provided that $a + b = 3$; R' is a $C_1 - C_6$ straight, cyclic or branched alkyl group, and R is a functionalizing group. R' may be, *e.g.*, methyl, ethyl, propyl, isopropyl, butyl, *t*-butyl, *sec*-butyl, pentyl, isopentyl, hexyl or cyclohexyl; preferably, R' is methyl. In certain embodiments, the organic groups may be similarly functionalized.

The functionalizing group R may include alkyl, aryl, cyano, amino, diol, nitro, cation or anion exchange groups, or embedded polar functionalities. Examples of suitable R functionalizing groups include $C_1 - C_{30}$ alkyl, including $C_1 - C_{20}$, such as octyl (C_8), octadecyl (C_{18}), and triacontyl (C_{30}); alkaryl, *e.g.*, $C_1 - C_4$ -phenyl; cyanoalkyl groups, *e.g.*, cyanopropyl; diol groups, *e.g.*, propyldiol; amino groups, *e.g.*, aminopropyl; and alkyl or aryl groups with embedded polar functionalities, *e.g.*, carbamate functionalities such as disclosed in U. S. Patent No. 5,374,755, the text of which is incorporated herein by reference. Such groups include those of the general formula

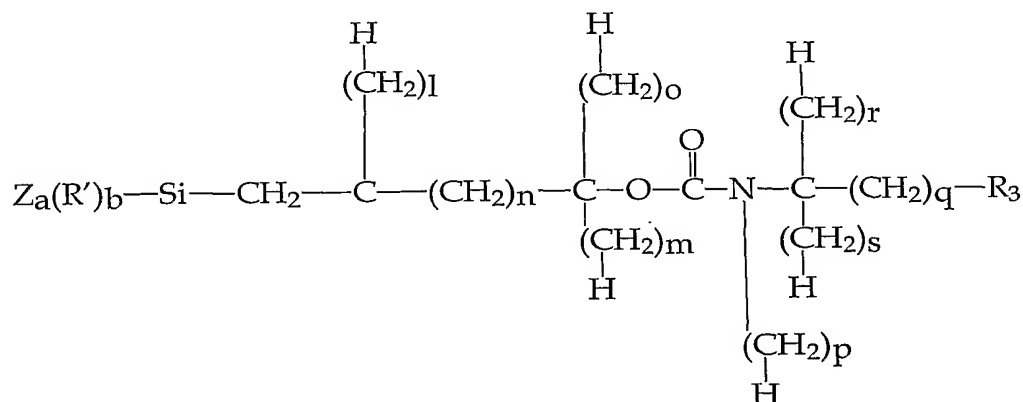

wherein l, m, o, r , and s are 0 or 1, n is 0, 1, 2 or 3 p is 0, 1, 2, 3 or 4 and q is an integer from 0 to 19; R_3 is selected from the group consisting of hydrogen, alkyl, cyano and phenyl; and Z, R', a and b are defined as above. Preferably, the carbamate functionality has the general structure indicated below:



wherein R^5 may be, *e.g.*, cyanoalkyl, *t*-butyl, butyl, octyl, dodecyl, tetradecyl, octadecyl, or benzyl. Advantageously, R^5 is octyl, , dodecyl, or octadecyl. In a preferred embodiment, the surface modifier may be an organotrihalosilane, such as

octyltrichlorosilane or octadecyltrichlorosilane. In an additional preferred embodiment, the surface modifier may be a halopolyorganosilane, such as octyldimethylchlorosilane or octadecyldimethylchlorosilane.

5 In another embodiment, the hybrid particle's organic groups and silanol groups are both surface modified or derivatized. In another embodiment, the particles are surface modified by coating with a polymer. In certain embodiments, surface modification by coating with a polymer is used in conjunction with silanol group modification, organic group modification, or both silanol and organic group modification.

10 The term "aliphatic group" includes organic compounds characterized by straight or branched chains, typically having between 1 and 22 carbon atoms. Aliphatic groups include alkyl groups, alkenyl groups and alkynyl groups. In complex structures, the chains can be branched or cross-linked. Alkyl groups include saturated hydrocarbons having one or more carbon atoms, including straight-chain alkyl groups and branched-
15 chain alkyl groups. Such hydrocarbon moieties may be substituted on one or more carbons with, for example, a halogen, a hydroxyl, a thiol, an amino, an alkoxy, an alkylcarboxy, an alkylthio, or a nitro group. Unless the number of carbons is otherwise specified, "lower aliphatic" as used herein means an aliphatic group, as defined above (e.g., lower alkyl, lower alkenyl, lower alkynyl), but having from one to six carbon
20 atoms. Representative of such lower aliphatic groups, e.g., lower alkyl groups, are methyl, ethyl, n-propyl, isopropyl, 2-chloropropyl, n-butyl, sec-butyl, 2-aminobutyl, isobutyl, tert-butyl, 3-thiopentyl, and the like. As used herein, the term "nitro" means -NO₂; the term "halogen" designates -F, -Cl, -Br or -I; the term "thiol" means SH; and the term "hydroxyl" means -OH. Thus, the term "alkylamino" as used herein means an alkyl
25 group, as defined above, having an amino group attached thereto. Suitable alkylamino groups include groups having 1 to about 12 carbon atoms, preferably from 1 to about 6 carbon atoms. The term "alkylthio" refers to an alkyl group, as defined above, having a sulfhydryl group attached thereto. Suitable alkylthio groups include groups having 1 to about 12 carbon atoms, preferably from 1 to about 6 carbon atoms. The term
30 "alkylcarboxyl" as used herein means an alkyl group, as defined above, having a carboxyl group attached thereto. The term "alkoxy" as used herein means an alkyl group, as defined above, having an oxygen atom attached thereto. Representative alkoxy groups include groups having 1 to about 12 carbon atoms, preferably 1 to about 6 carbon atoms, e.g., methoxy, ethoxy, propoxy, tert-butoxy and the like. The terms "alkenyl"
35 and "alkynyl" refer to unsaturated aliphatic groups analogous to alkyls, but which contain at least one double or triple bond respectively. Suitable alkenyl and alkynyl

groups include groups having 2 to about 12 carbon atoms, preferably from 1 to about 6 carbon atoms.

The term "alicyclic group" includes closed ring structures of three or more carbon atoms. Alicyclic groups include cycloparaffins or naphthenes which are saturated cyclic hydrocarbons, cycloolefins which are unsaturated with two or more double bonds, and cycloacetylenes which have a triple bond. They do not include aromatic groups. Examples of cycloparaffins include cyclopropane, cyclohexane, and cyclopentane. Examples of cycloolefins include cyclopentadiene and cyclooctatetraene. Alicyclic groups also include fused ring structures and substituted alicyclic groups such as alkyl substituted alicyclic groups. In the instance of the alicyclics such substituents can further comprise a lower alkyl, a lower alkenyl, a lower alkoxy, a lower alkylthio, a lower alkylamino, a lower alkylcarboxyl, a nitro, a hydroxyl, -CF₃, -CN, or the like.

The term "heterocyclic group" includes closed ring structures in which one or more of the atoms in the ring is an element other than carbon, for example, nitrogen, sulfur, or oxygen. Heterocyclic groups can be saturated or unsaturated and heterocyclic groups such as pyrrole and furan can have aromatic character. They include fused ring structures such as quinoline and isoquinoline. Other examples of heterocyclic groups include pyridine and purine. Heterocyclic groups can also be substituted at one or more constituent atoms with, for example, a halogen, a lower alkyl, a lower alkenyl, a lower alkoxy, a lower alkylthio, a lower alkylamino, a lower alkylcarboxyl, a nitro, a hydroxyl, -CF₃, -CN, or the like. Suitable heteroaromatic and heteroalicyclic groups generally will have 1 to 3 separate or fused rings with 3 to about 8 members per ring and one or more N, O or S atoms, e.g. coumarinyl, quinolinyl, pyridyl, pyrazinyl, pyrimidyl, furyl, pyrrolyl, thienyl, thiazolyl, oxazolyl, imidazolyl, indolyl, benzofuranyl, benzothiazolyl, tetrahydrofuranyl, tetrahydropyranal, piperidinyl, morpholino and pyrrolidinyl.

The term "aromatic group" includes unsaturated cyclic hydrocarbons containing one or more rings. Aromatic groups include 5- and 6-membered single-ring groups which may include from zero to four heteroatoms, for example, benzene, pyrrole, furan, thiophene, imidazole, oxazole, thiazole, triazole, pyrazole, pyridine, pyrazine, pyridazine and pyrimidine, and the like. The aromatic ring may be substituted at one or more ring positions with, for example, a halogen, a lower alkyl, a lower alkenyl, a lower alkoxy, a lower alkylthio, a lower alkylamino, a lower alkylcarboxyl, a nitro, a hydroxyl, -CF₃, -CN, or the like.

The term "alkyl" includes saturated aliphatic groups, including straight-chain alkyl groups, branched-chain alkyl groups, cycloalkyl (alicyclic) groups, alkyl substituted cycloalkyl groups, and cycloalkyl substituted alkyl groups. In certain embodiments, a straight chain or branched chain alkyl has 30 or fewer carbon atoms in

its backbone, *e.g.*, C₁-C₃₀ for straight chain or C₃-C₃₀ for branched chain. In certain embodiments, a straight chain or branched chain alkyl has 20 or fewer carbon atoms in its backbone, *e.g.*, C₁-C₂₀ for straight chain or C₃-C₂₀ for branched chain, and more preferably 18 or fewer. Likewise, preferred cycloalkyls have from 4-10 carbon atoms in their ring structure, and more preferably have 4-7 carbon atoms in the ring structure. The term "lower alkyl" refers to alkyl groups having from 1 to 6 carbons in the chain, and to cycloalkyls having from 3 to 6 carbons in the ring structure.

Moreover, the term "alkyl" (including "lower alkyl") as used throughout the specification and claims includes both "unsubstituted alkyls" and "substituted alkyls", the latter of which refers to alkyl moieties having substituents replacing a hydrogen on one or more carbons of the hydrocarbon backbone. Such substituents can include, for example, halogen, hydroxyl, alkylcarbonyloxy, arylcarbonyloxy, alkoxycarbonyloxy, aryloxy carbonyloxy, carboxylate, alkylcarbonyl, alkoxycarbonyl, aminocarbonyl, alkylthiocarbonyl, alkoxyl, phosphate, phosphonato, phosphinato, cyano, amino (including alkyl amino, dialkylamino, arylamino, diarylamino, and alkylarylamino), acylamino (including alkylcarbonylamino, arylcarbonylamino, carbamoyl and ureido), amidino, imino, sulfhydryl, alkylthio, arylthio, thiocarboxylate, sulfate, sulfonato, sulfamoyl, sulfonamido, nitro, trifluoromethyl, cyano, azido, heterocyclyl, aralkyl, or an aromatic or heteroaromatic moiety. It will be understood by those skilled in the art that the moieties substituted on the hydrocarbon chain can themselves be substituted, if appropriate. Cycloalkyls can be further substituted, *e.g.*, with the substituents described above. An "aralkyl" moiety is an alkyl substituted with an aryl, *e.g.*, having 1 to 3 separate or fused rings and from 6 to about 18 carbon ring atoms, *e.g.*, phenylmethyl (benzyl).

The term "aryl" includes 5- and 6-membered single-ring aromatic groups that may include from zero to four heteroatoms, for example, unsubstituted or substituted benzene, pyrrole, furan, thiophene, imidazole, oxazole, thiazole, triazole, pyrazole, pyridine, pyrazine, pyridazine and pyrimidine, and the like. Aryl groups also include polycyclic fused aromatic groups such as naphthyl, quinolyl, indolyl, and the like. The aromatic ring can be substituted at one or more ring positions with such substituents, *e.g.*, as described above for alkyl groups. Suitable aryl groups include unsubstituted and substituted phenyl groups. The term "aryloxy" as used herein means an aryl group, as defined above, having an oxygen atom attached thereto. The term "aralkoxy" as used herein means an aralkyl group, as defined above, having an oxygen atom attached thereto. Suitable aralkoxy groups have 1 to 3 separate or fused rings and from 6 to about 18 carbon ring atoms, *e.g.*, O-benzyl.

The term "amino," as used herein, refers to an unsubstituted or substituted moiety of the formula $\text{-NR}_a\text{R}_b$, in which R_a and R_b are each independently hydrogen, alkyl, aryl, or heterocyclyl, or R_a and R_b , taken together with the nitrogen atom to which they are attached, form a cyclic moiety having from 3 to 8 atoms in the ring. Thus, the term

5 "amino" includes cyclic amino moieties such as piperidiny1 or pyrrolidinyl groups, unless otherwise stated. An "amino-substituted amino group" refers to an amino group in which at least one of R_a and R_b , is further substituted with an amino group.

The present porous inorganic/organic hybrid particles having a chromatographically-enhancing pore geometry generally have a specific surface area, as

10 measured by N_2 sorption analysis, of about 50 to $800\text{m}^2/\text{g}$, preferably about 75 to $600\text{m}^2/\text{g}$, more preferably about 100 to $350\text{m}^2/\text{g}$. The specific pore volume of the particles is generally about 0.25 to $1.5\text{cm}^3/\text{g}$, preferably about 0.4 to $1.2\text{cm}^3/\text{g}$, more preferably about 0.5 to $1.0\text{cm}^3/\text{g}$. The porous inorganic/organic hybrid particles having a chromatographically-enhancing pore geometry have an average pore diameter of

15 generally about 50 to 500 Å, preferably about 60 to 500 Å, more preferably about 100 to 300 Å. The micropore surface area is less than about $110\text{m}^2/\text{g}$, preferably less than about $105\text{m}^2/\text{g}$, more preferably less than about $80\text{m}^2/\text{g}$, and still more preferably less than about $50\text{m}^2/\text{g}$.

Porous inorganic/organic hybrid particles having a chromatographically-

20 enhancing pore geometry may be made as described below and in the specific instances illustrated in the Examples. Porous spherical particles of hybrid silica may, in a preferred embodiment, be prepared by a multi-step process. In the first step, one or more organoalkoxysilanes such as methyltriethoxysilane, and a tetraalkoxysilane such as tetraethoxysilane (TEOS) are prepolymerized to form a polyorganoalkoxysiloxane

25 (POS), *e.g.*, polyalkylalkoxysiloxane, by co-hydrolyzing a mixture of the two or more components in the presence of an acid catalyst. In the second step, the POS is suspended in an aqueous medium in the presence of a surfactant or a combination of surfactants and gelled into porous spherical particles of hybrid silica using a base catalyst. In the third

30 step, the pore structure of the hybrid silica particles is modified by hydrothermal treatment, producing an intermediate hybrid silica product which may be used for particular purposes itself, or desirably may be further processed below. The above three steps of the process allow much better control of the particle sphericity, morphology, pore volume and pore sizes than those described in the prior art, and thus provide the chromatographically-enhancing pore geometry.

35 In one embodiment of the invention, the surface organic groups of the hybrid silica are derivatized or modified in a subsequent step via formation of an organic covalent bond between the particle's organic group and the modifying reagent.

Alternatively, the surface silanol groups of the hybrid silica are derivatized or modified into siloxane functional groups, such as by reacting with an organotrihalosilane, *e.g.*, octadecyltrichlorosilane, or a halopolyorganosilane, *e.g.*, octadecyldimethylchlorosilane. Alternatively, the surface organic and silanol groups of the hybrid silica are both
5 derivatized or modified. The surface of the thus-prepared material is then covered by the organic groups, *e.g.*, alkyl, embedded during the gelation and the organic groups added during the derivatization process or processes. The surface coverage by the overall organic groups is higher than in conventional silica-based packing materials, and therefore the surface concentration of the remaining silanol groups in the hybrid silica is
10 smaller. The resulting material, used as a stationary phase for LC, shows excellent peak shape for basic analytes, and better stability to alkaline mobile phases than silica-based packing materials.

Where the prepolymerization step involves co-hydrolyzing a mixture of the two or more components in the presence of an acid catalyst, the content of the
15 organoalkoxysilane, *e.g.*, organotrialkoxysilane can be varied, *e.g.*, from about 0.03 to about 1.0 mole per mole, or more preferably, about 0.2 to about 0.5 mole per mole, of the tetraalkoxysilane. The amount of the water used for the hydrolysis can be varied, *e.g.*, from 1.10 to 1.35 mole per mole of the silane. The silane, water and the ethanol mixture, in the form of a homogeneous solution, is stirred and heated to reflux under a
20 flow of argon. After it is refluxed for a time sufficient to prepolymerize to form polyorganoalkoxysiloxane (POS), *e.g.*, polyalkylalkoxysiloxane, the solvent and the side product, mainly ethanol, is distilled off from the reaction mixture. Thereafter, the residue is heated at an elevated temperature, *e.g.*, in the range of 120 to 140°C under an atmosphere of argon for a period of time, *e.g.*, 1.5 to 16 h. The residue is further heated
25 at this temperature, *e.g.*, for 1 to 3 h under reduced pressure, *e.g.*, 10^{-2} - 10^{-3} torr, to remove any volatile species.

In the second step, the POS is suspended into fine beads in a solution containing water and ethanol at 55°C by agitation. The volume percent of ethanol in the solution is varied from 10 to 20%. A non-ionic surfactant such as Triton X-100 or Triton X-45 is
30 added into the suspension as the suspending agent. Alternatively a mixture of Triton X-45 and low levels of sodium dodecyl sulfate (SDS) or tris(hydroxymethyl)aminomethane lauryl sulfate (TDS) is added into the suspension as the suspending agent. The surfactants, *e.g.*, alkylphenoxypolyethoxyethanol, are believed to be able to orient at the hydrophobic/hydrophilic interface between the POS beads and the aqueous phase to
35 stabilize the POS beads. The surfactants are also believed to enhance the concentration of water and the base catalyst on the surface of the POS beads during the gelation step, through their hydrophilic groups, which induces the gelling of the POS beads from the

surface towards the center. Use of surfactants to modulate the surface structure of the POS beads stabilizes the shape of the POS beads throughout the gelling process, and minimizes or suppresses formation of particles having an irregular shapes, *e.g.*, "shell shaped", and inhomogeneous morphology.

5 It is also possible to suspend a solution containing POS and toluene in the aqueous phase, instead of POS alone. The toluene, which is insoluble in the aqueous phase, remains in the POS beads during the gelation step and functions as a porogen. By controlling the relative amount of toluene in the POS/toluene solution, the pore volume of the final hybrid silica can be more precisely controlled. This allows the preparation of
10 hybrid silica particles having large pore volume, *e.g.*, 0.8-1.2 cm³/g.

 The gelation step is initiated by adding the basic catalyst, *e.g.*, ammonium hydroxide into the POS suspension agitated at 55°C. Thereafter, the reaction mixture is agitated at the same temperature to drive the reaction to completion. Ammonium hydroxide is preferred because bases such as sodium hydroxide are a source of unwanted
15 cations, and ammonium hydroxide is easier to remove in the washing step. The thus-prepared hybrid silica is filtered and washed with water and methanol free of ammonium ions, then dried.

 In one embodiment, the pore structure of the as-prepared hybrid material is modified by hydrothermal treatment, which enlarges the openings of the pores as well as
20 the pore diameters, as confirmed by nitrogen (N₂) sorption analysis. The hydrothermal treatment is performed by preparing a slurry containing the as-prepared hybrid material and a solution of organic base in water, heating the slurry in an autoclave at an elevated temperature, *e.g.*, 143 to 168°C, for a period of 6 to 28 h. The pH of the slurry can be adjusted to be in the range of 8.0 to 10.7 using concentrated acetic acid. The
25 concentration of the slurry is in the range of 1g hybrid material per 5 to 10 ml of the base solution. The thus-treated hybrid material is filtered, and washed with water and acetone until the pH of the filtrate reaches 7, then dried at 100°C under reduced pressure for 16 h. The resultant hybrid materials show average pore diameters in the range of 100-300 Å. The surface of the hydrothermally treated hybrid material may be modified in a
30 similar fashion to that of the hybrid material that is not modified by hydrothermal treatment as described in the present invention.

 The surface of the hydrothermally treated hybrid silica contains organic groups, which can be derivatized by reacting with a reagent that is reactive towards the particles' organic group. For example, vinyl groups on the particle can be reacted with a variety of
35 olefin reactive reagents such as bromine (Br₂), hydrogen (H₂), free radicals, propagating polymer radical centers, dienes, and the like. In another example, hydroxyl groups on the particle can be reacted with a variety of alcohol reactive reagents such as isocyanates,

carboxylic acids, carboxylic acid chlorides, and reactive organosilanes as described below. Reactions of this type are well known in the literature, *see, e.g.*, March, J. "Advanced Organic Chemistry," 3rd Edition, Wiley, New York, 1985; Odian, G. "The Principles of Polymerization," 2nd Edition, Wiley, New York, 1981; the texts of which
5 are incorporated herein by reference.

In addition, the surface of the hydrothermally treated hybrid silica also contains silanol groups, which can be derivatized by reacting with a reactive organosilane. The surface derivatization of the hybrid silica is conducted according to standard methods, for example by reaction with octadecyltrichlorosilane or octadecyldimethylchlorosilane
10 in an organic solvent under reflux conditions. An organic solvent such as toluene is typically used for this reaction. An organic base such as pyridine or imidazole is added to the reaction mixture to catalyze the reaction. The product of this reaction is then washed with water, toluene and acetone and dried at 80°C to 100°C under reduced pressure for 16 h. The resultant hybrid silica can be further reacted with a short-chain
15 silane such as trimethylchlorosilane to endcap the remaining silanol groups, by using a similar procedure described above.

More generally, the surface of the hybrid silica particles may be surface modified with a surface modifier, *e.g.*, $Z_a(R')_bSi-R$, where $Z = Cl, Br, I, C_1 - C_5$ alkoxy, dialkylamino, *e.g.*, dimethylamino, or trifluoromethanesulfonate; a and b are each an
20 integer from 0 to 3 provided that $a + b = 3$; R' is a $C_1 - C_6$ straight, cyclic or branched alkyl group, and R is a functionalizing group, and by coating with a polymer. R' may be, *e.g.*, methyl, ethyl, propyl, isopropyl, butyl, t-butyl, sec-butyl, pentyl, isopentyl, hexyl or cyclohexyl; preferably, R' is methyl.

The functionalizing group R may include alkyl, alkenyl, alkynyl, aryl, cyano, amino, diol, nitro, cation or anion exchange groups, or alkyl or aryl groups with
25 embedded polar functionalities. Examples of suitable R functionalizing groups include $C_1 - C_{30}$ alkyl, including $C_1 - C_{20}$, such as octyl (C_8), octadecyl (C_{18}), and triacontyl (C_{30}); alkaryl, *e.g.*, $C_1 - C_4$ -phenyl; cyanoalkyl groups, *e.g.*, cyanopropyl; diol groups, *e.g.*, propyldiol; amino groups, *e.g.*, aminopropyl; and alkyl or aryl groups with embedded
30 polar functionalities, *e.g.*, carbamate functionalities such as disclosed in U. S. Patent No. 5,374,755, the text of which is incorporated herein by reference and as detailed hereinabove. In a preferred embodiment, the surface modifier may be an organotrihalosilane, such as octyltrichlorosilane or octadecyltrichlorosilane. In an additional preferred embodiment, the surface modifier may be a halopolyorganosilane,
35 such as octyldimethylchlorosilane or octadecyldimethylchlorosilane. Advantageously, R is octyl or octadecyl.

Polymer coatings are known in the literature and may be provided generally by polymerization or polycondensation of physisorbed monomers onto the surface without chemical bonding of the polymer layer to the support (type I), polymerization or polycondensation of physisorbed monomers onto the surface with chemical bonding of the polymer layer to the support (type II), immobilization of physisorbed prepolymers to the support (type III), and chemisorption of presynthesized polymers onto the surface of the support (type IV). *see, e.g., Hanson et al., J. Chromat. A656 (1993) 369-380*, the text of which is incorporated herein by reference. As noted above, coating the hybrid material with a polymer may be used in conjunction with various surface modifications described in the invention.

The porous inorganic/organic hybrid particles have a wide variety of end uses in the separation sciences, such as packing materials for chromatographic columns (wherein such columns may have improved stability to alkaline mobile phases and reduced peak tailing for basic analytes), thin layer chromatographic (TLC) plates, filtration membranes, microtiter plates, scavenger resins, solid phase organic synthesis supports, and the like having a stationary phase which includes porous inorganic/organic hybrid particles having a chromatographically-enhancing pore geometry. The stationary phase may be introduced by packing, coating, impregnation, etc., depending on the requirements of the particular device. In a particularly advantageous embodiment, the chromatographic device is a packed chromatographic column, such as commonly used in HPLC.

Examples

The present invention may be further illustrated by the following non-limiting examples describing the preparation of porous inorganic/organic hybrid particles, and their use.

EXAMPLE 1

An organoalkoxysilane and tetraethoxysilane (all from Gelest Inc., Tullytown, PA) are mixed with ethanol (HPLC grade, J.T. Baker, Phillipsburgh, NJ) and 0.1 N hydrochloric acid (Aldrich Chemical, Milwaukee, WI) in a flask. The resulting solution is agitated and refluxed for 16 h in an atmosphere of argon or nitrogen. Ethanol and methanol (if applicable) are removed from the flask via distillation at atmospheric pressure. Residual alcohol and volatile species are removed by heating at 115-140° C for 1-2 h in a sweeping stream of inert gas or by heating at 125°C under reduced pressure for 1-2 h. The resulting polyorganoalkoxysiloxanes are colorless viscous liquids. The product numbers and the respective chemical formula of the organotrialkoxysilanes used in the copolymerization with tetraethoxysilane are listed in Table 1. The specific amounts of starting materials used to prepare these products are listed in Table 2.

15

TABLE 1

Used in Products	Organoalkoxysilane Chemical Formula	Organic Group Name
1a,b,c	$\text{CH}_3\text{Si}(\text{OCH}_2\text{CH}_3)_3$	methyl
1d	$\text{C}_2\text{H}_5\text{Si}(\text{OCH}_2\text{CH}_3)_3$	ethyl
1e	$\text{C}_6\text{H}_5\text{Si}(\text{OCH}_2\text{CH}_3)_3$	phenyl
1f,g,h,i,j,	$(\text{CH}_3\text{CH}_2\text{O})_3\text{Si}(\text{CH}_2)_2\text{Si}(\text{OCH}_2\text{CH}_3)_3$	ethane bridge
1k,l	$\text{H}_2\text{C}=\text{CHSi}(\text{OCH}_2\text{CH}_3)_3$	vinyl
1m,n,o	$\text{H}_2\text{C}=\text{C}(\text{CH}_3)\text{CO}_2\text{C}_3\text{H}_6\text{Si}(\text{OCH}_3)_3$	methacryloxypropyl
1p,q	$\text{H}_2\text{C}=\text{CHC}_6\text{H}_4\text{C}_2\text{H}_4\text{Si}(\text{OCH}_3)_3$	styrylethyl

TABLE 2

Product	Mole Ratio: Organosilane/ TEOS	Organotri- alkoxysilane (g)	TEOS (g)	0.1N HCl (g)	Ethanol (mL)
1a	0.20	137	802	109	400
1b	0.35	249	832	116	300
1c	0.50	534	1248	203	450
1d	0.25	116	503	65	300
1e	0.25	113	392	53	300
1f	0.037	19	297	37	218
1g	0.125	59	278	39	218
1h	0.25	106	250	40	218
1i	0.50	177	208	43	218
1j	1.0	266	156	46	218
1k	0.25	160	875	119	253
1l	0.50	799	1750	297	736
1m	0.10	179	1500	178	463
1n	0.125	373	2500	304	788
1o	0.25	671	2250	304	788
1p	0.033	15	355	42	99
1q	0.10	20	156	19	47

EXAMPLE 2

A mixture of a surfactant (Triton X-45 or Triton X-100, Aldrich Chemical, Milwaukee, WI), ethanol (anhydrous, J.T. Baker, Phillipsburgh, NJ), and deionized water was heated at 55°C for 0.5h, resulting in a white liquid. Under rapid agitation, a solution of toluene (HPLC grade, J.T. Baker, Phillipsburgh, NJ) in polyorganalkoxysiloxane (selected from Table 2) was added into the ethanol/water/Triton mixture, and emulsified in the aqueous phase. Thereafter, 30% NH₄OH (VWR, Bridgeport, NJ) was added into the emulsion to gel the emulsion beads. Suspended in the solution, the gelled product was transferred to a flask and stirred at 55°C for 16h. The resulting spherical, porous, hybrid inorganic/organic particles were collected on 0.5 µm filtration paper and washed successively with water and methanol (HPLC grade, J.T. Baker, Phillipsburgh, NJ). The products were then dried in a vacuum oven at 80°C overnight. Specific amounts of starting materials used to prepare these products are listed in Table 3. ¹³C and ²⁹Si CPMAS NMR spectra of the products are

consistent with the assigned products with respect to organic group structure and ratio of organic/inorganic units. For products, 2q, 2r, and 2s, approximately 30% of the methacryoxypropyl ester groups were observed to hydrolyze to the corresponding 3-hydroxypropyl organic unit and methacrylic acid, where the acid was removed in the wash steps.

EXAMPLE 3

A mixture of Triton X-45 and sodium dodecylsulfate (SDS) (J.T. Baker, Phillipsburgh, NJ) or tris(hydroxymethyl)aminomethane lauryl sulfate (TDS) (Fluka Chemical, Milwaukee, WI) was used to prepare spherical, porous, hybrid inorganic/ organic particles made from the polyorganoalkoxysiloxanes consisting of bis(triethoxysilyl)ethane/TEOS molar ratios of 0.5 and 1.0 (Table 2, products 1i and 1j, respectively). The procedure was the same as described for Example 2, except that the 30% NH₄OH was added to the emulsion after transfer from the emulsifier reactor to the stirred reaction flask. The molar ratio of Triton X-45/SDS or TDS was 1.2/1.0. Specific amounts of reagents used to prepare these products (2l, 2m, 2n) are listed in Table 3.

TABLE 3

Product	Polyorgano-alkoxysilane Feedstock	Mole Ratio: Organosiloxane/SiO ₂ in product	Polyorgano-alkoxysilane (g)	Toluene (mL)	Ethanol (mL)	Water (mL)	Surfactant Type	Surfactant (g)	Ammonium Hydroxide (mL)
2a	1a	0.20	240	0	240	960	X-100	20	150
2b	1c	0.50	240	0	240	960	X-100	20	150
2c	1a	0.20	249	30	285	1200	X-45	24	190
2d	1b	0.35	249	30	285	1200	X-45	24	190
2e	1c	0.50	249	30	285	1200	X-45	24	190
2f	1c	0.50	249	60	285	1200	X-45	24	190
2g	1d	0.25	240	0	240	960	X-100	20	150
2h	1e	0.25	240	0	240	960	X-100	20	150
2i	1f	0.037	58	7.0	66	280	X-45	5.6	44
2j	1g	0.125	500	70	660	2800	X-45	56	440
2k	1h	0.25	580	70	660	2800	X-45	56	440
2l	1i	0.50	58	7.0	66	280	X-45/SDS	5.6	44
2m	1i	0.50	58	7.0	66	280	X-45/TDS	5.6	44
2n	1j	1.0	58	7.0	66	280	X-45/SDS	5.6	44
2o	1k	0.25	436	53	482	2100	X-45	42	362
2p	1l	0.50	479	58	530	2310	X-45	46	398
2q	1m	0.10	479	58	530	2310	X-45	46	398
2r	1n	0.125	53	6.5	59	257	X-45	5.2	44
2s	1o	0.25	53	6.5	59	257	X-45	5.2	44
2t	1p	0.033	202	25	223	973	X-45	19.5	168
2u	1q	0.10	53	6.6	59	257	X-45	5.1	44

EXAMPLE 4

Spherical, porous, hybrid inorganic/organic particles of Examples 2 were mixed with tris(hydroxymethyl)aminomethane (TRIS, Aldrich Chemical, Milwaukee, WI) in water, yielding a slurry. The pH of the slurry was adjusted as necessary to between 8 and 10.7 by adding concentrated acetic acid. The resultant slurry was then enclosed in a stainless steel autoclave and heated to between 140 and 165°C for 20 h. After the autoclave cooled to room temperature the product was filtered and washed repeatedly using water and methanol (HPLC grade, J.T. Baker, Phillipsburgh, NJ), and then dried at 80°C under vacuum for 16 h. Specific hydrothermal conditions (mL of TRIS solution/gram of hybrid silica particle, concentration and pH of initial TRIS solution, reaction temperature) used to prepare these products are listed in Table 4. The specific surface areas (SSA), specific pore volumes (SPV) and the average pore diameters (APD) of these materials are measured using the multi-point N₂ sorption method and are listed in Table 5. The specific surface area was calculated using the BET method, the specific pore volume was the single point value determined for P/P₀ > 0.99, and the average pore diameter was calculated from the desorption leg of the isotherm using the BJH method. We also determined the micropore surface area (MPA), which we defined as the surface area in pores with diameters less than or equal to 34 Å, determined from the adsorption leg of the isotherm using the BJH method.

Methacryloxypropyl hybrid materials (*e.g.*, 3q, 3r, 3s) were converted into 3-hydroxypropyl hybrid materials via hydrolysis of the ester bond during hydrothermal treatment. Conversion of the ester into the alcohol group was observed by a decrease in the %C of the particles before vs. after treatment. ¹³C CPMAS NMR spectra of the hydrothermally treated particles detect 3-hydroxypropyl groups only, however, FTIR spectra of the particles indicate the existence of a carbonyl containing group as evidenced by a weak band at 1695cm⁻¹. Higher concentrations of TRIS solution were required to modify the pore structure of these particles because a portion of the base was sequestered as the methacrylic acid salt. The composition of methacryloxypropyl particles post hydrothermal treatment was relabeled to 3-hydroxypropyl. All post hydrothermal compositions were confirmed using %CHN, FTIR, ¹³C and ²⁹Si CPMAS NMR spectroscopy.

TABLE 4

Product	Precursor	Prehydrothermal Composition of Hybrid Materials	TRIS Conditions			
			Amount (mL/g)	Conc. (Molarity)	pH	Temp. (°C)
3a	2a	$\text{SiO}_2/(\text{CH}_3\text{SiO}_{1.5})_{0.2}$	10	0.10	8.0	143
3b	2b	$\text{SiO}_2/(\text{CH}_3\text{SiO}_{1.5})_{0.2}$	10	0.10	8.1	143
3c	2c	$\text{SiO}_2/(\text{CH}_3\text{SiO}_{1.5})_{0.2}$	10	0.10	8.4	155
3d	2d	$\text{SiO}_2/(\text{CH}_3\text{SiO}_{1.5})_{0.35}$	10	0.10	8.0	143
3e	2e	$\text{SiO}_2/(\text{CH}_3\text{SiO}_{1.5})_{0.5}$	10	0.10	8.3	143
3f1	2f1	$\text{SiO}_2/(\text{CH}_3\text{SiO}_{1.5})_{0.5}$	10	0.10	8.3	143
3f2	2f2	$\text{SiO}_2/(\text{CH}_3\text{SiO}_{1.5})_{0.5}$	10	0.10	8.75	148
3f3	2f3	$\text{SiO}_2/(\text{CH}_3\text{SiO}_{1.5})_{0.5}$	10	0.10	9.0	163
3g	2g	$\text{SiO}_2/(\text{C}_2\text{H}_5\text{SiO}_{1.5})_{0.25}$	10	0.10	8.3	143
3i	2i	$\text{SiO}_2/[\text{C}_2\text{H}_4(\text{SiO}_{1.5})_2]_{0.037}$	5	0.10	10.2	165
3j	2j	$\text{SiO}_2/[\text{C}_2\text{H}_4(\text{SiO}_{1.5})_2]_{0.125}$	5	0.10	10.0	165
3k	2k	$\text{SiO}_2/[\text{C}_2\text{H}_4(\text{SiO}_{1.5})_2]_{0.25}$	5	0.30	10.0	165
3l	2l	$\text{SiO}_2/[\text{C}_2\text{H}_4(\text{SiO}_{1.5})_2]_{0.5}$	5	0.30	10.2	165
3m	2m	$\text{SiO}_2/[\text{C}_2\text{H}_4(\text{SiO}_{1.5})_2]_{0.5}$	5	0.30	10.2	165
3n	2n	$\text{SiO}_2/[\text{C}_2\text{H}_4(\text{SiO}_{1.5})_2]_{1.0}$	5	0.30	10.2	165
3o	2o	$\text{SiO}_2/(\text{H}_2\text{C}=\text{CHSiO}_{1.5})_{0.25}$	5	0.10	8.5	155
3p1	2p	$\text{SiO}_2/(\text{H}_2\text{C}=\text{CHSiO}_{1.5})_{0.5}$	5	0.10	8.5	155
3p2	2p	$\text{SiO}_2/(\text{H}_2\text{C}=\text{CHSiO}_{1.5})_{0.5}$	5	0.10	10.2	155
3q	2q	$\text{SiO}_2/[\text{H}_2\text{C}=\text{C}(\text{CH}_3)\text{CO}_2\text{C}_3\text{H}_6\text{SiO}_{1.5}]_{0.10}$	5	0.75	10.7	155
3r	2r	$\text{SiO}_2/[\text{H}_2\text{C}=\text{C}(\text{CH}_3)\text{CO}_2\text{C}_3\text{H}_6\text{SiO}_{1.5}]_{0.125}$	5	0.75	10.7	155
3t	2t	$\text{SiO}_2/(\text{H}_2\text{C}=\text{CHC}_6\text{H}_4\text{C}_2\text{H}_4\text{SiO}_{1.5})_{0.033}$	5	0.10	9.6	155
3u	2u	$\text{SiO}_2/(\text{H}_2\text{C}=\text{CHC}_6\text{H}_4\text{C}_2\text{H}_4\text{SiO}_{1.5})_{0.10}$	5	0.75	10.7	155

TABLE 5

Product	Post-hydrothermal Composition of Hybrid Materials	N ₂ Sorption Data			
		SSA (m ² /g)	SPV (cc/g)	APD (Å)	MPA (m ² /g)
3a	SiO ₂ /(CH ₃ SiO _{1.5}) _{0.2}	130	0.41	103	72
3b	SiO ₂ /(CH ₃ SiO _{1.5}) _{0.2}	151	0.71	159	14
3c	SiO ₂ /(CH ₃ SiO _{1.5}) _{0.2}	135	0.67	173	15
3d	SiO ₂ /(CH ₃ SiO _{1.5}) _{0.35}	160	0.72	139	14
3e	SiO ₂ /(CH ₃ SiO _{1.5}) _{0.5}	225	0.90	123	21
3f1	SiO ₂ /(CH ₃ SiO _{1.5}) _{0.5}	188	0.70	125	15
3f2	SiO ₂ /(CH ₃ SiO _{1.5}) _{0.5}	155	0.69	148	15
3f3	SiO ₂ /(CH ₃ SiO _{1.5}) _{0.5}	125	0.62	168	13
3g	SiO ₂ /(C ₂ H ₅ SiO _{1.5}) _{0.25}	267	0.94	139	53
3i	SiO ₂ /[C ₂ H ₄ (SiO _{1.5}) ₂] _{0.037}	162	0.52	122	28
3j	SiO ₂ /[C ₂ H ₄ (SiO _{1.5}) ₂] _{0.125}	127	0.81	238	31
3k	SiO ₂ /[C ₂ H ₄ (SiO _{1.5}) ₂] _{0.25}	162	0.52	122	28
3l	SiO ₂ /[C ₂ H ₄ (SiO _{1.5}) ₂] _{0.5}	122	0.48	133	23
3m	SiO ₂ /[C ₂ H ₄ (SiO _{1.5}) ₂] _{0.5}	155	0.45	101	34
3n	SiO ₂ /[C ₂ H ₄ (SiO _{1.5}) ₂] _{1.0}	150	0.45	107	32
3o	SiO ₂ /(H ₂ C=CHSiO _{1.5}) _{0.25}	143	0.73	194	26
3p1	SiO ₂ /(H ₂ C=CHSiO _{1.5}) _{0.5}	219	0.65	141	101
3p2	SiO ₂ /(H ₂ C=CHSiO _{1.5}) _{0.5}	165	0.54	155	94
3q	SiO ₂ /[HOC ₃ H ₆ SiO _{1.5}] _{0.10}	324	1.04	113	23
3r	SiO ₂ /[HOC ₃ H ₆ SiO _{1.5}] _{0.125}	353	0.76	79	50
3t	SiO ₂ /(H ₂ C=CHC ₆ H ₄ C ₂ H ₄ SiO _{1.5}) _{0.033}	153	0.62	153	31
3u	SiO ₂ /(H ₂ C=CHC ₆ H ₄ C ₂ H ₄ SiO _{1.5}) _{0.10}	193	0.55	102	58

EXAMPLE 5

- 5 The particles of hybrid silica prepared according to Example 4 were separated by particle size into ~ 3, ~5, and ~7 μm fractions. The particles were then dispersed in a 1 molar hydrochloric acid solution (Aldrich Chemical) for 20 h at 98°C. After the acid treatment was completed, the particles were washed with water to a neutral pH, followed

by acetone (HPLC grade, J.T. Baker, Phillipsburgh, NJ). The particles were then dried at 80°C under vacuum for 16 h.

EXAMPLE 6

Vinyl hybrid silica particles (product 3p1 of Example 5) were sized and acid washed according to Example 5. A 20g amount of the 5µm vinyl hybrid particles were added onto an 80 mm OD watch glass and placed inside a 90 x 170 mm (H x OD) crystallizing dish. Fuming bromine, 5 mL (Aldrich Chemical), was then added around the outside diameter of the watch glass, and the crystallization dish was covered with an inverted 100 x 190 mm (H x OD) crystallization dish. The bromination reaction was performed at ambient temperature for 18 h. Excess bromine was subsequently removed, and the material was washed exhaustively with methylene chloride (HPLC grade, J.T. Baker), water, and again with methylene chloride. The brominated particles were then dried at 80°C under vacuum for 16 h. Incorporation of 18.6% bromine was measured by combustion-titration analysis (Galbraith Laboratories, Knoxville, TN), and 20% of the vinyl groups were converted into the dibromoethane analog as determined by ¹³C CPMAS NMR spectroscopy.

EXAMPLE 7

Vinyl hybrid silica particles (product 3p1 of Example 5) were sized and acid washed according to Example 5. A 50g amount of the 5µm vinyl hybrid particles was combined with 15.0 g p-toluenesulfonhydrazide (Aldrich Chemical), 14.3 g tripropylamine (Aldrich Chemical), and 300 mL o-xylene (Aldrich Chemical) in a 500 mL three-neck round-bottom flask. The reaction mixture was heated to 140°C for 6 h. and was then cooled to room temperature (30°C). The flask was recharged with the same amount of p-toluenesulfonhydrazide and tripropylamine, and the reaction mixture was reheated to 140°C for another 16 h. The particles were then washed exhaustively with toluene, acetone, acetone/water (50/50, v/v), and acetone (all solvents HPLC grade, J.T. Baker). The washed particles were then dried at 80°C under vacuum for 16 h. The dried particles were reacted an additional 7 successive times, as described above, to afford a 1/20 ratio of unreacted vinyl groups to hydrogenated vinyl groups (*i.e.*, ethyl). The vinyl content was found to decrease with each successive reaction as measured by ¹³C CPMAS NMR spectroscopy.

EXAMPLE 8

Vinyl hybrid silica particles (product 3p1 of Example 5) were sized and acid washed according to Example 5. A 10g amount of the 5µm vinyl hybrid particles was combined with 62 g of 4,4'-azobis(4-cyanovaleric acid) (Aldrich Chemical) in 125 mL

of a methanol/water (50/50, v/v) solution. The suspension was deoxygenated by bubbling argon gas through it for 1 h, after which an argon blanket was maintained over the suspension. The suspension was then heated to 70°C for 20 h and subsequently cooled to room temperature. The mixture was transferred to a filter apparatus and washed exhaustively with toluene, acetone/water (50/50, v/v), and acetone (all solvents HPLC grade, J.T. Baker). The washed particles were then dried at 80°C under vacuum for 16 h. Coupling of 4-cyanovaleric acid to the vinyl group of the skeletal structure through a covalent organic bond was established by an 18% increase in particle carbon content, and an ion-exchange capacity of 0.18 meq/g assigned to the carboxylic group.

10

EXAMPLE 9

Vinyl hybrid silica particles (product 3p1 of Example 5) were sized and acid washed according to Example 5. A 10g amount of the 5µm vinyl hybrid particles was combined with 62 g of 2,2'-azobis(2-methylpropionamidine) dihydrochloride (Aldrich Chemical) in 125 mL of a methanol/water (50/50, v/v) solution. The suspension was deoxygenated by bubbling argon gas through it for 1 h, after which an argon blanket was maintained over the suspension. The suspension was heated to 50°C for 20 h and subsequently cooled to room temperature. The mixture was transferred to a filter apparatus and washed exhaustively with toluene, acetone/water (50/50, v/v), and acetone (all solvents HPLC grade, J.T. Baker). The washed particles were then dried at 80°C under vacuum for 16 h. Coupling of (2-methylpropionamidine) hydrochloride to the vinyl group of the skeletal structure through a covalent organic bond was established by a 10% increase in particle carbon content, and an ion-exchange capacity of 0.15 meq/g, assigned to the amidine hydrochloride group. Furthermore, ¹³C CPMAS NMR spectroscopy of the particles showed resonances assigned to the 2-methylpropionamidine group.

25

EXAMPLE 10

Vinyl hybrid silica particles (product 3p1 of Example 5) were sized and acid washed according to Example 5. A 2g amount of the 7 µm vinyl hybrid particles was combined with 2.1 g of N-octadecylacrylamide (Aldrich Chemical) in 20 mL of toluene (J.T. Baker). The suspension was deoxygenated by bubbling argon gas through it for 1 h, after which an argon blanket was maintained over the suspension. While maintaining an argon blanket, 0.4 g of VAZO 88 was added to the reaction, and the reaction mixture was heated to 70°C for 17h. The flask was then cooled to room temperature, and the particles were transferred to a filter apparatus. The filtered particles were washed exhaustively with tetrahydrofuran, toluene, acetone, acetone/water (50/50, v/v), and acetone (all solvents HPLC grade, J.T. Baker). The washed particles were then dried at

30

35

80°C under vacuum for 16 h. Radical initiated coupling of octadecylacrylamide groups with vinyl groups of the skeletal structure through a covalent organic bond was established by a 29% increase in particle carbon content, which converts to a surface concentration of 1.02 $\mu\text{mol}/\text{m}^2$. Furthermore, ^{13}C CPMAS NMR and FTIR spectroscopy of the particles showed resonances consistent with octadecylacrylamide addition to the vinyl groups.

EXAMPLE 11

Vinyl hybrid silica particles (product 3p1 of Example 5) were sized and acid washed according to Example 5. A 3 g amount of the 7 μm vinyl hybrid particles was combined with 0.9 g dicyclopentadiene (Aldrich Chemical) in 25 mL of toluene (J.T. Baker). The suspension was heated to reflux (111°C) for 16 h and then cooled to room temperature. The particles were transferred to a filter apparatus and washed exhaustively with toluene and acetone (both HPLC grade, J.T. Baker). The washed particles were then dried at 80°C under vacuum for 16 h. Diels-Alder cycloaddition of cyclopentadiene with the vinyl groups through a covalent organic bond was established by a 14% increase in particle carbon content that is analogous to a surface concentration of 1.36 $\mu\text{mol}/\text{m}^2$. Furthermore, ^{13}C CPMAS NMR and FTIR spectroscopy of the particles showed resonances consistent with diene addition.

EXAMPLE 12

Propanol hybrid silica particles (product 3q of Example 5) were sized and acid washed according to Example 5. A 3 g amount of the dried 6 μm propanol hybrid particles and 4.9 g of octylisocyanate (Aldrich Chemical) were combined with 75 mL of dry toluene (J.T. Baker) under an argon blanket. The suspension was heated to reflux (111°C) for 4 h and then cooled to 60°C. The particles were transferred to a filter apparatus and washed exhaustively with toluene heated to 80°C and then room temperature acetone (both HPLC grade, J.T. Baker). The washed particles were then dried at 80°C under vacuum for 16 h. Reaction of the octyl isocyanate molecule with the hybrid particle's hydroxyl group to form a carbamate group and thereby connect the octyl chain to the particle's skeletal structure through a covalent organic bond was established by a 94% increase in particle carbon content that is analogous to a surface concentration of 1.59 $\mu\text{mol}/\text{m}^2$ of O-propylsilyl N-octyl carbamate group. Furthermore, ^{13}C CPMAS NMR spectroscopy of the particles showed resonances consistent with addition product, where 40% of the propanol groups were converted to carbamate groups, and the remaining propanol groups remained unreacted.

EXAMPLE 13

A 3 g amount of the dried 6 μm propanol hybrid particles, as described in Example 12, and 6.7 g of dodecyl isocyanate (Aldrich Chemical) were combined with 75 mL of dry toluene (J.T. Baker) and reacted in the same way as described in Example 12.

5 Addition of the dodecyl isocyanate molecule to the hybrid particle's hydroxyl group to form a carbamate group and thereby connect the dodecyl chain to the particle's skeletal structure through a covalent organic bond was established by the reaction procedure and a 119% increase in particle carbon content that is analogous to a surface loading of 1.41 $\mu\text{mol}/\text{m}^2$ of O-propylsilyl N-dodecyl carbamate group. Furthermore, ^{13}C CPMAS NMR

10 spectroscopy of the particles showed resonances consistent with addition product, where 40% of the propanol groups were converted to carbamate groups, and the remaining propanol groups remained unreacted.

EXAMPLE 14

Propanol hybrid silica particles (product 3q of Example 5) were sized and acid

15 washed according to Example 5. A 3 g amount of the dried 6 μm propanol hybrid particles, 0.47 g of p-toluenesulfonic acid (Aldrich Chemical), and 10.0 g of lauric acid (Sigma Chemical, St. Louis, MO) were combined with 100 mL of dry xylene (J.T. Baker) under an argon blanket. The suspension was heated to reflux (145°C) for 16 h and then cooled to 30°C. The particles were then transferred to a filter apparatus and

20 washed exhaustively with toluene, acetone, acetone/water (50/50, v/v), and acetone again (all solvents HPLC grade, J.T. Baker). The washed particles were then dried at 80 °C under vacuum for 16 h. Reaction of the lauric acid molecule with the hybrid particle's hydroxyl group to form a carboxylic acid ester bond and thereby connect the n- $\text{C}_{11}\text{H}_{23}$ alkyl chain to the particle's skeletal structure through a covalent organic bond

25 was established by the reaction procedure and a 157% increase in particle carbon content, which converts to a surface concentration of 2.06 $\mu\text{mol}/\text{m}^2$ of n- $\text{C}_{11}\text{H}_{23}$ alkyl groups. Furthermore, ^{13}C CPMAS NMR spectroscopy of the particles showed resonances consistent with ester product, where 30% of the propanol groups were converted to ester groups, and the remaining propanol groups remained unreacted.

EXAMPLE 15

Propanol hybrid silica particles (product 3q of Example 5) were sized and acid washed according to Example 5. A 3 g amount of the dried 6 μm propanol hybrid particles and 3.3 mL of dried triethylamine (Aldrich Chemical) were combined with 150 mL of dry dichloromethane (HPLC grade, J.T. Baker) under an argon blanket and

35 chilled to 5°C. Maintaining a temperature of 5°C, 1.95 mL of methacryloyl chloride (Aldrich Chemical) was added dropwise to the suspension. Three additional aliquots of

triethylamine and methacryloyl chloride were added for a combined total of 13.2 mL triethylamine and 7.8 mL methacryloyl chloride. The suspension was allowed to warm to room temperature and was stirred an additional 16 h. The particles were transferred to a filter apparatus and washed exhaustively with dichloromethane, acetone, water, and again with acetone (all solvents HPLC grade, J.T. Baker). The washed particles were then dried at 80°C under vacuum for 16 h. Reaction of the methacryloyl chloride molecule with the hybrid particle's hydroxyl group to form a carboxylic acid ester bond and thereby connect the methacrylate's vinyl group to the particle's skeletal structure through a covalent organic bond was established by a 63% increase in particle carbon content that is analogous to a surface concentration of 2.30 $\mu\text{mol}/\text{m}^2$ of methacrylate groups. Furthermore, ^{13}C CPMAS NMR spectroscopy of the particles showed resonances consistent with ester product, where 60% of the propanol groups were converted to ester groups, and the remaining propanol groups remained unreacted.

EXAMPLE 16

A 0.5 g amount of the dried styrylethyl hybrid particles (product 3t of Example 5) was brominated in the manner described in Example 6. Greater than 99% of the vinyl groups were converted into the dibromoethane analog as determined by ^{13}C CPMAS NMR spectroscopy.

EXAMPLE 17

Styrylethyl hybrid silica particles (product 3u of Example 5) were sized according to Example 5. A 0.5 g amount of the dried 8 μm styrylethyl hybrid particles was brominated in the manner described in Example 6. Greater than 99% of the vinyl groups were converted into the dibromoethane analog as determined by ^{13}C CPMAS NMR spectroscopy.

EXAMPLE 18

A 2.0 g amount of the dried styrylethyl hybrid particles (product 3t of Example 5) was suspended in 20 mL of toluene (J.T. Baker) and refluxed for 2 h under an argon atmosphere to deoxygenate and removed adsorbed water via azeotrope. After cooling to room temperature under dry argon, 0.6 g of 1,1'-azobis(cyclohexanecarbonitrile) (Aldrich Chemical) was added. The suspension was stirred and heated to 80°C for 17 h then heated to 100°C for 2.5 h. After cooling, the particles were recovered by filtration, and exhaustively washed with toluene, dichloromethane and acetone. The washed particles were then dried at 80°C under vacuum for 16 h. Reaction of the cyclohexanecarbonitrile molecule with the hybrid particle's vinyl group, thereby

connecting the reagent to the particle's skeletal structure through a covalent organic bond was established by a 23% increase in particle carbon content that is analogous to a surface concentration of $1.09 \mu\text{mol}/\text{m}^2$ of cyclohexanecarbonitrile groups. Greater than 99% of the vinyl groups were polymerized as determined by ^{13}C CPMAS NMR

5 spectroscopy.

EXAMPLE 19

Styrylethyl hybrid silica particles (product 3u of Example 5) were sized according to Example 5. A 2.0 g amount of the dried $8 \mu\text{m}$ styrylethyl hybrid particles was reacted with 0.9 g of 1,1'-azobis(cyclohexanecarbonitrile) in the manner described above for Example 18. Reaction of the cyclohexanecarbonitrile molecule with the hybrid particle's vinyl group, thereby connecting the reagent to the particle's skeletal structure through a covalent organic bond was established by a 9.7% increase in particle carbon content, which converts to a surface concentration of $1.07 \mu\text{mol}/\text{m}^2$ of cyclohexanecarbonitrile groups. Greater than 99% of the vinyl groups were polymerized as determined by ^{13}C CPMAS NMR spectroscopy

EXAMPLE 20

A 2.0 g amount of the dried styrylethyl hybrid particles (product 3t of Example 5) was combined with 0.29 g of 1,1'-azobis(cyclohexanecarbonitrile) (Aldrich Chemical) and 25 mL of dichloromethane (J.T. Baker) in a 25 mL round-bottom flask. After stirring the suspension until the radical initiator was dissolved, the dichloromethane was removed from the suspension by rotary-evaporation. The initiator coated particles were dried under high vacuum (0.1 mm Hg) for 18 h. In a similar sized flask, 10 mL of styrene (Aldrich Chemical) was added and degassed via high vacuum. Under a closed, reduced pressure system, styrene vapor was allowed to equilibrate between the two flasks for 1.5 h, thereby adsorbing onto the styrylethyl hybrid particles. The coated, styrylethyl hybrid particles were then vented to argon and heated to 80°C for 20h. After cooling, the particles were recovered by filtration and exhaustively washed with toluene, dichloromethane and acetone. The washed particles were then dried at 80°C under vacuum for 16 h. Greater than 99% of the vinyl groups were copolymerized with the adsorbed styrene as determined by ^{13}C CPMAS NMR spectroscopy. Reaction of the cyclohexanecarbonitrile and styrene molecules with the hybrid particle's vinyl group thereby connecting the reagents to the particle's skeletal structure through a covalent organic bond was established by a 16.3% increase in particle carbon content.

35

EXAMPLE 21

Styrylethyl hybrid silica particles (product 3u of Example 5) were sized according to Example 5. A 2.0 g amount of the dried 8 μm styrylethyl hybrid particles was reacted with 0.25 g of 1,1'-azobis(cyclohexanecarbonitrile) in the manner described above for Example 20. Greater than 99% of the vinyl groups were copolymerized with the adsorbed styrene as determined by ^{13}C CPMAS NMR spectroscopy. Reaction of the cyclohexanecarbonitrile and styrene molecules with the hybrid particle's vinyl group, thereby connecting the reagents to the particle's skeletal structure through a covalent organic bond was established by a 42% increase in particle carbon content.

EXAMPLE 22

Styrylethyl hybrid silica particles (product 3u of Example 5) were sized according to Example 5. A 2.0 g amount of the dried 8 μm styrylethyl hybrid particles was reacted with 0.20 g of 1,1'-azobis(cyclohexanecarbonitrile) in the manner described above for Example 20, with the exception that divinylbenzene (Aldrich Chemical) was used as the adsorbed monomer. Greater than 99% of the vinyl groups were copolymerized with the adsorbed divinylbenzene as determined by ^{13}C CPMAS NMR spectroscopy. Reaction of the cyclohexanecarbonitrile and divinylbenzene molecules with the hybrid particle's vinyl group, thereby connecting the reagents to the particle's skeletal structure through a covalent organic bond was established by a 37% increase in particle carbon content.

EXAMPLE 23

The surfaces of the hybrid silica particles were modified with a variety of chlorotrialkylsilanes as follows: 1×10^{-5} moles of silane per square meter of particle surface area and 1.2 equivalents (per mole silane) of a base activator such as 4-(dimethylamino)pyridine (Aldrich Chemical), imidazole (Aldrich Chemical), or pyridine (J.T. Baker) were added to a mixture of 10 g of hybrid silica in 50 mL of toluene (J.T. Baker), and the resultant mixture was refluxed for 2- 4 h. The modified hybrid silica particles were filtered and washed successively with water, toluene, 1:1 v/v acetone/water, and acetone (all solvents from J.T. Baker), and then dried at 80°C under reduced pressure for 16 h. The surface concentration ($\mu\text{mol}/\text{m}^2$) of trialkylsilyl groups was determined by the difference in particle %C before and after the surface modification as measured by elemental analysis.

A secondary surface modification or end capping reaction was performed using a second silane, chlorotrimethylsilane (Aldrich Chemical), following the above procedure with respect to reagent amounts and reaction conditions. Table 6 lists the unmodified

hybrid particle composition, the chemical formula of the first silane, the chemical formula of the second or end capping silane, the surface concentration of the first silane bonded phase, and total %C for selected final modified particles. Silanes and their sources were as follows: chlorodimethyloctadecylsilane and chlorotrimethylsilane (both from Aldrich Chemical); 3-(chlorodimethylsilyl)propyl N-octadecylcarbamate, 3-(chlorodimethylsilyl)propyl N-dodecylcarbamate, and 3-(chlorodimethylsilyl)propyl N-benzylcarbamate (all prepared as described in Neue, Niederländer, and Petersen in US Patent 5,374,755); [3-(pentafluorophenyl)-propyl]dimethylchlorosilane, octyldiisopropylchlorosilane, and triacontyldimethylchlorosilane (all from Gelest, Inc.).

Table 6

Product	Composition of Hybrid Material Prior to Modification	Primary Silane Chemical Formula	Secondary Silane Chemical Formula	Surface Concentration ($\mu\text{mol}/\text{m}^2$)	%C Final Modified Particle
24a	$\text{SiO}_2/(\text{CH}_3\text{SiO}_{1.5})_{0.2}$	$\text{CH}_3(\text{CH}_2)_{17}\text{Si}(\text{CH}_3)_2\text{Cl}$	$\text{ClSi}(\text{CH}_3)_3$	2.73	11.06
24b	$\text{SiO}_2/(\text{CH}_3\text{SiO}_{1.5})_{0.35}$	$\text{CH}_3(\text{CH}_2)_{17}\text{Si}(\text{CH}_3)_2\text{Cl}$	$\text{ClSi}(\text{CH}_3)_3$	2.50	14.80
24c	$\text{SiO}_2/(\text{CH}_3\text{SiO}_{1.5})_{0.5}$	$\text{CH}_3(\text{CH}_2)_{17}\text{Si}(\text{CH}_3)_2\text{Cl}$	$\text{ClSi}(\text{CH}_3)_3$	2.18	15.02
24d	$\text{SiO}_2/(\text{CH}_3\text{SiO}_{1.5})_{0.5}$	$\text{CH}_3(\text{CH}_2)_{17}\text{Si}(\text{CH}_3)_2\text{Cl}$	$\text{ClSi}(\text{CH}_3)_3$	2.23	17.21
24e	$\text{SiO}_2/(\text{CH}_3\text{SiO}_{1.5})_{0.5}$	$\text{CH}_3(\text{CH}_2)_{17}\text{NHC}(\text{O})\text{O}(\text{CH}_2)_3\text{Si}(\text{CH}_3)_2\text{Cl}$	$\text{ClSi}(\text{CH}_3)_3$	1.80	14.84
24f	$\text{SiO}_2/(\text{CH}_3\text{SiO}_{1.5})_{0.5}$	$\text{CH}_3(\text{CH}_2)_{11}\text{NHC}(\text{O})\text{O}(\text{CH}_2)_3\text{Si}(\text{CH}_3)_2\text{Cl}$	$\text{ClSi}(\text{CH}_3)_3$	2.34	14.74
24g	$\text{SiO}_2/(\text{CH}_3\text{SiO}_{1.5})_{0.5}$	$\text{CH}_3(\text{CH}_2)_7\text{NHC}(\text{O})\text{O}(\text{CH}_2)_3\text{Si}(\text{CH}_3)_2\text{Cl}$	$\text{ClSi}(\text{CH}_3)_3$	2.42	13.46
24h	$\text{SiO}_2/(\text{CH}_3\text{SiO}_{1.5})_{0.5}$	$\text{C}_6\text{H}_5(\text{CH}_2)\text{NHC}(\text{O})\text{O}(\text{CH}_2)_3\text{Si}(\text{CH}_3)_2\text{Cl}$	$\text{ClSi}(\text{CH}_3)_3$	2.49	13.02
24i	$\text{SiO}_2/(\text{CH}_3\text{SiO}_{1.5})_{0.5}$	$\text{C}_6\text{F}_5(\text{CH}_2)_3\text{Si}(\text{CH}_3)_2\text{Cl}$	$\text{ClSi}(\text{CH}_3)_3$	2.27	11.66
24j	$\text{SiO}_2/(\text{CH}_3\text{SiO}_{1.5})_{0.5}$	$\text{CH}_3(\text{CH}_2)_7\text{Si}[\text{CH}(\text{CH}_3)_2]_2\text{Cl}$	$\text{ClSi}(\text{CH}_3)_3$	1.23	10.76
24k	$\text{SiO}_2/(\text{CH}_3\text{SiO}_{1.5})_{0.5}$	$\text{CH}_3(\text{CH}_2)_{29}\text{Si}(\text{CH}_3)_2\text{Cl}$	$\text{ClSi}(\text{CH}_3)_3$	1.94	18.48
24l	$\text{SiO}_2/[\text{C}_2\text{H}_4(\text{SiO}_{1.5})_2]_{0.25}$	$\text{CH}_3(\text{CH}_2)_{11}\text{NHC}(\text{O})\text{O}(\text{CH}_2)_3\text{Si}(\text{CH}_3)_2\text{Cl}$	$\text{ClSi}(\text{CH}_3)_3$	2.55	15.28
24m	$\text{SiO}_2/[\text{HOC}_3\text{H}_6\text{SiO}_{1.5}]_{0.10}$	$\text{CH}_3(\text{CH}_2)_7\text{Si}[\text{CH}(\text{CH}_3)_2]_2\text{Cl}$	-----	1.74	13.89
24n	$\text{SiO}_2/[\text{RSiO}_{1.5}]_{0.10}$ where R = 60% HOC_3H_6 and 40% $\text{CH}_3(\text{CH}_2)_7\text{NHC}(\text{O})\text{OC}_3\text{H}_6$	$\text{ClSi}(\text{CH}_3)_3$	-----	2.44	12.95
24o	$\text{SiO}_2/[\text{RSiO}_{1.5}]_{0.10}$ where R = 60% HOC_3H_6 and 40% $\text{CH}_3(\text{CH}_2)_{11}\text{NHC}(\text{O})\text{OC}_3\text{H}_6$	$\text{ClSi}(\text{CH}_3)_3$	-----	3.10	14.50

EXAMPLE 24

The surfaces of the hybrid silica particles were modified with a variety of dialkyldichlorosilanes, alkyltrichlorosilanes, and alkyltrialkoxysilanes as follows: 1×10^{-5} moles of silane per square meter of particle surface area and 1.2 equivalents (per mole silane) of a base activator such as 4-(dimethylamino)pyridine (Aldrich Chemical), imidazole (Aldrich Chemical), or pyridine (J.T. Baker) were added to a mixture of 10 g of hybrid silica in 50 mL of toluene (J.T. Baker) and the resultant mixture was refluxed for 2- 4 h. The modified hybrid silica particles were filtered and washed successively with toluene, 1:1 v/v acetone/water, and acetone (all solvents from J.T. Baker). The washed particles were then heated in a 4.5:1 v/v solution of acetone/0.12 M ammonium acetate for 2.0-3.0 hours at 60°C. The particles were subsequently cooled, filtered, and washed successively with 1:1 v/v acetone/water, and acetone, and then dried at 80°C under reduced pressure for 16 h. The surface concentration ($\mu\text{mol}/\text{m}^2$) of dialkylsilyl and alkylsilyl groups was determined by the difference in particle %C before and after the surface modification as measured by elemental analysis.

A secondary surface modification or end capping reaction was run using a second silane, including chlorotrimethylsilane, chlorotriethylsilane, and tert-butyldimethylchlorosilane (all from Aldrich Chemical), following the above procedure with respect to reagent amounts and reaction conditions. Table 7 lists the unmodified hybrid particle composition, the chemical formula of the first silane, the chemical formula of the second or end capping silane, the surface concentration of the first silane bonded phase, and total %C for selected final modified particles. Silanes and their sources were as follows: octadecyltrichlorosilane (Aldrich Chemical); octadecylmethyldichlorosilane, (3-phenylpropyl)trichlorosilane, (3-phenylpropyl)methyldichlorosilane, (4-phenylbutyl)methyldichlorosilane, phenethyltrichlorosilane, [3-(pentafluorophenyl)propyl]trichlorosilane, triacontyltrichlorosilane (all from Silar Laboratories, Scotia, NY); (2-phenylpropyl)methyldichlorosilane (Gelest Inc.); 1H,1H,2H,2H-perfluorooctyltriethoxysilane (Sivento, Piscataway, NJ); phenyltrichlorosilane, 3-cyanopropyltrichlorosilane (Hüls, Piscataway, NJ).

TABLE 7

Product	Composition of Hybrid Material Prior to Modification	Primary Silane Chemical Formula	Secondary Silane Chemical Formula	Surface Concentration ($\mu\text{mol}/\text{m}^2$)	%C Final Modified Particle
25a	$\text{SiO}_2/(\text{CH}_3\text{SiO}_{1.5})_{0.5}$	$\text{CH}_3(\text{CH}_2)_{17}\text{Si}(\text{CH}_3)\text{Cl}_2$	$\text{ClSi}(\text{CH}_3)_3$	2.23	15.31
25b	$\text{SiO}_2/(\text{CH}_3\text{SiO}_{1.5})_{0.5}$	$\text{C}_6\text{H}_5(\text{CH}_2)_3\text{Si}(\text{CH}_3)\text{Cl}_2$	$\text{ClSi}(\text{CH}_3)_3$	2.31	12.25
25c	$\text{SiO}_2/(\text{CH}_3\text{SiO}_{1.5})_{0.5}$	$\text{C}_6\text{H}_5(\text{CH}_2)_3\text{Si}(\text{CH}_3)\text{Cl}_2$	$\text{ClSi}(\text{CH}_2\text{CH}_3)_3$	2.31	12.39
25d	$\text{SiO}_2/(\text{CH}_3\text{SiO}_{1.5})_{0.5}$	$\text{C}_6\text{H}_5(\text{CH}_2)_3\text{Si}(\text{CH}_3)\text{Cl}_2$	$\text{Cl}(\text{CH}_3)_2\text{SiC}(\text{CH}_3)_3$	2.31	12.07
25e	$\text{SiO}_2/(\text{CH}_3\text{SiO}_{1.5})_{0.5}$	$\text{C}_6\text{H}_5(\text{CH}_2)_3\text{CHCH}_2\text{Si}(\text{CH}_3)\text{Cl}_2$	$\text{ClSi}(\text{CH}_3)_3$	2.11	11.76
25f	$\text{SiO}_2/(\text{CH}_3\text{SiO}_{1.5})_{0.5}$	$\text{C}_6\text{H}_5(\text{CH}_2)_4\text{Si}(\text{CH}_3)\text{Cl}_2$	$\text{ClSi}(\text{CH}_3)_3$	2.37	12.76
25g	$\text{SiO}_2/(\text{CH}_3\text{SiO}_{1.5})_{0.5}$	$\text{CH}_3(\text{CH}_2)_{29}\text{SiCl}_3$	$\text{ClSi}(\text{CH}_3)_3$	2.30	19.84
25h	$\text{SiO}_2/(\text{CH}_3\text{SiO}_{1.5})_{0.5}$	$\text{CH}_3(\text{CH}_2)_{17}\text{SiCl}_3$	$\text{ClSi}(\text{CH}_3)_3$	2.13	15.43
25i	$\text{SiO}_2/(\text{CH}_3\text{SiO}_{1.5})_{0.5}$	$\text{CH}_3(\text{CH}_2)_{17}\text{SiCl}_3$	$\text{ClSi}(\text{CH}_2\text{CH}_3)_3$	2.13	15.75
25j	$\text{SiO}_2/(\text{CH}_3\text{SiO}_{1.5})_{0.5}$	$\text{CH}_3(\text{CH}_2)_{17}\text{SiCl}_3$	$\text{Cl}(\text{CH}_3)_2\text{SiC}(\text{CH}_3)_3$	2.13	15.33
25k	$\text{SiO}_2/(\text{CH}_3\text{SiO}_{1.5})_{0.5}$	$\text{CH}_3(\text{CH}_2)_7\text{SiCl}_3$	$\text{ClSi}(\text{CH}_3)_3$	2.23	11.70
25l	$\text{SiO}_2/(\text{CH}_3\text{SiO}_{1.5})_{0.5}$	$\text{CF}_3(\text{CF}_2)_5(\text{CH}_2)_2\text{Si}(\text{OCH}_2\text{CH}_3)_3$	$\text{ClSi}(\text{CH}_3)_3$	1.46	9.90
25m	$\text{SiO}_2/(\text{CH}_3\text{SiO}_{1.5})_{0.5}$	$\text{C}_6\text{F}_5(\text{CH}_2)_3\text{SiCl}_3$	$\text{ClSi}(\text{CH}_3)_3$	2.13	11.67
25n	$\text{SiO}_2/(\text{CH}_3\text{SiO}_{1.5})_{0.5}$	$\text{C}_6\text{H}_5(\text{CH}_2)_2\text{SiCl}_3$	$\text{ClSi}(\text{CH}_3)_3$	2.42	12.02
25o	$\text{SiO}_2/(\text{CH}_3\text{SiO}_{1.5})_{0.5}$	$\text{C}_6\text{H}_5(\text{CH}_2)_2\text{SiCl}_3$	$\text{ClSi}(\text{CH}_2\text{CH}_3)_3$	2.35	12.09
25p	$\text{SiO}_2/(\text{CH}_3\text{SiO}_{1.5})_{0.5}$	$\text{C}_6\text{H}_5(\text{CH}_2)_2\text{SiCl}_3$	$\text{Cl}(\text{CH}_3)_2\text{SiC}(\text{CH}_3)_3$	2.42	11.72
25q	$\text{SiO}_2/(\text{CH}_3\text{SiO}_{1.5})_{0.5}$	$\text{C}_6\text{H}_5(\text{CH}_2)_4\text{SiCl}_3$	$\text{ClSi}(\text{CH}_3)_3$	2.20	12.57
25r	$\text{SiO}_2/(\text{CH}_3\text{SiO}_{1.5})_{0.5}$	$\text{C}_6\text{H}_5\text{SiCl}_3$	$\text{ClSi}(\text{CH}_3)_3$	2.09	10.74
25s	$\text{SiO}_2/(\text{CH}_3\text{SiO}_{1.5})_{0.5}$	$\text{C}_6\text{H}_5\text{SiCl}_3$	$\text{Cl}(\text{CH}_3)_2\text{SiC}(\text{CH}_3)_3$	2.09	10.88
25t	$\text{SiO}_2/(\text{CH}_3\text{SiO}_{1.5})_{0.5}$	$\text{NC}(\text{CH}_2)_3\text{SiCl}_3$	-----	2.31	-----

25u	$\text{SiO}_2/[\text{C}_2\text{H}_4(\text{SiO}_{1.5})_{0.25}]_{0.25}$	$\text{CH}_3(\text{CH}_2)_{17}\text{SiCl}_3$	$\text{ClSi}(\text{CH}_3)_3$	2.62	15.74
25v	$\text{SiO}_2/(\text{H}_2\text{C}=\text{CHSiO}_{1.5})_{0.5}$	$\text{CH}_3(\text{CH}_2)_{17}\text{SiCl}_3$	$\text{ClSi}(\text{CH}_3)_3$	1.28	18.26
25w	$\text{SiO}_2/(\text{RSiO}_{1.5})_{0.5}$ where R = 20% BrCH_2CHBr and 80% $\text{H}_2\text{C}=\text{CH}$	$\text{CH}_3(\text{CH}_2)_{17}\text{SiCl}_3$	$\text{ClSi}(\text{CH}_3)_3$	1.73	14.31
25x	$\text{SiO}_2/(\text{RSiO}_{1.5})_{0.5}$ where R = 95% CH_3CH_2 and 5% $\text{H}_2\text{C}=\text{CH}$	$\text{CH}_3(\text{CH}_2)_{17}\text{SiCl}_3$	$\text{ClSi}(\text{CH}_3)_3$	1.38	17.14
25y	$\text{SiO}_2/(\text{RSiO}_{1.5})_{0.5}$ where R = 3.4% $\text{HO}_2\text{CCH}_2\text{CH}_2\text{C}(\text{CH}_3)(\text{CN})\text{-CH}_2\text{CH}_2$ and 96.6% $\text{H}_2\text{C}=\text{CH}$	$\text{CH}_3(\text{CH}_2)_{17}\text{SiCl}_3$	$\text{ClSi}(\text{CH}_3)_3$	0.86	18.29
25z	$\text{SiO}_2/(\text{RSiO}_{1.5})_{0.5}$ where R = 3.4% $\text{HCl}\cdot\text{H}_2\text{N}(\text{HN}=\text{C}(\text{CH}_3)_2\text{-CH}_2\text{CH}_2$ and 96.6% $\text{H}_2\text{C}=\text{CH}$	$\text{CH}_3(\text{CH}_2)_{17}\text{SiCl}_3$	$\text{ClSi}(\text{CH}_3)_3$	1.23	18.85
25aa	$\text{SiO}_2/[\text{HOC}_3\text{H}_6\text{SiO}_{1.5}]_{0.10}$	$\text{CH}_3(\text{CH}_2)_{29}\text{SiCl}_3$	$\text{ClSi}(\text{CH}_3)_3$	2.16	19.03
25bb	$\text{SiO}_2/[\text{HOC}_3\text{H}_6\text{SiO}_{1.5}]_{0.10}$	$\text{CH}_3(\text{CH}_2)_{17}\text{SiCl}_3$	$\text{ClSi}(\text{CH}_3)_3$	2.30	25.47
25cc	$\text{SiO}_2/[\text{HOC}_3\text{H}_6\text{SiO}_{1.5}]_{0.10}$	$\text{C}_6\text{F}_5(\text{CH}_2)_3\text{SiCl}_3$	$\text{ClSi}(\text{CH}_3)_3$	1.92	13.01

EXAMPLE 25

Selected examples of surface derivatized hybrid silicas from Example 23 were used for the separation of a mixture of neutral, polar and basic compounds listed in Table 8. The 3.9 x 150 mm chromatographic columns were packed using a slurry packing technique. The HPLC system consisted of an Alliance 2690 XE separations module, a model 996 photodiode array detector, a Millennium³² v. 2.15.01 data management system (all from Waters Corporation, Milford, MA), and a NESLAB RTE-111 circulating water bath for column temperature control (NESLAB Instruments, Inc., Portsmouth, NH). Mobile phase conditions were: 20 mM KH₂PO₄/K₂HPO₄, pH 7.0/methanol (35:65 v/v); flow rate: 1.0 mL/min; temperature: 23.4°C; detection: 254 nm.

TABLE 8

	Product 19b in Table 6	Product 19c in Table 6	Product 19d in Table 6
k of Acenaphthene	10.02	11.35	13.40
Relative Retention (r)			
Propranolol/Acenaphthene	0.157	0.149	0.139
Butyl paraben/Acenaphthene	0.226	0.216	0.223
Dipropyl Phthalate/Acenaphthene	0.411	0.405	0.403
Naphthalene/Acenaphthene	0.437	0.436	0.437
Amitriptyline /Acenaphthene	1.483	1.525	1.395

It can be seen that the packing materials based on the hybrid materials provide ample retention and resolution in the separation of neutral, polar, and basic compounds. (Relative retention is the (k of the analyte) divided by the (k of acenaphthene). Therefore values less than one, indicate less retention than acenaphthene, and values greater than one, indicate more retention than acenaphthene. Relative retention is a well known parameter in the field of HPLC.)

EXAMPLE 26

Selected examples of surface derivatized hybrid materials from Examples 23 and 24 as well as similarly derivatized commercial columns based on silica which have similar alkyl silyl groups were evaluated for basic compound USP peak tailing factors

using the mobile phase and test conditions of Example 25. The results are shown in Table 9.

TABLE 9

Column	USP Tailing Factors	
	Propranolol	Amitriptyline
Commercial Column A (C ₃₀ Type)	1.6	3.6
Example 23j (C ₃₀ Type)	1.3	2.3
Commercial Column C (C ₁₈ Type)	4.2	7.0
Commercial Column D (C ₁₈ Type)	1.3	1.8
Commercial Column E (C ₁₈ Type)	1.0	1.7
Commercial Column F (C ₁₈ Type)	1.3	1.5
Example 23b (C ₁₈ Type)	1.1	1.0
Example 23c (C ₁₈ Type)	1.0	1.4
Example 23d (C ₁₈ Type)	1.0	1.4
Example 24a (C ₁₈ Type)	1.0	1.3
Example 24h (C ₁₈ Type)	1.1	1.3
Example 24i (C ₁₈ Type)	1.2	1.7
Example 24u (C ₁₈ Type)	1.1	2.0
Commercial Column I (Embedded Polar Type)	1.3	1.3
Example 23f (Embedded Polar Type)	1.1	1.2
Example 23l (Embedded Polar Type)	1.0	1.1
Commercial Column J (C ₈ Type)	1.1	1.3

Commercial Column K (C ₈ Type)	1.2	1.4
Example 23k (C ₈ Type)	1.1	1.3
Commercial Column L (Ph Type)	1.8	3.9
Commercial Column M (Ph Type)	2.1	1.6
Example 23h (Ph Type)	1.3	1.2
Example 24c (Ph Type)	1.2	1.4
Example 24e (Ph Type)	1.1	1.5
Example 24f (Ph Type)	1.0	1.3
Commercial Column O (C ₆ F ₅ Type)	3.8	6.9
Commercial Column P (C ₆ F ₅ Type)	1.3	4.2
Example 23i (C ₆ F ₅ Type)	1.2	1.4
Example 24m (C ₆ F ₅ Type)	2.3	1.8
Commercial Column Q (CN type)	1.7	3.0
Example 24t (CN Type)	1.2	1.4

It can be seen that the basic compound tailing factors on the packing materials based on the hybrid materials were generally lower than on the commercial silica-based materials (a lower value corresponds to reduced tailing).

EXAMPLE 27

- 5 Selected examples of surface derivatized hybrid silicas from Examples 23 and 24 as well as similarly derivatized commercial columns based on silica gel which have similar alkyl silyl groups were evaluated for stability in alkaline mobile phases using the following procedure. Columns were prepared by slurry packing the materials into 4.6 x 150 mm steel columns, and the analysis conditions were as follows: 1) The plate

number, N , (5 sigma method) was measured for a test analyte, acenaphthene. Mobile phase conditions were acetonitrile-20 mM $\text{KH}_2\text{PO}_4/\text{K}_2\text{HPO}_4$ pH 7.00 (40:60, v/v) at a flow of 1.0 mL/min and a column temperature of 50.0°C. 2) The column was purged with 50 mM triethylamine pH 10.00 mobile phase and run for 15 min in the 50 mM triethylamine pH 10.00 mobile phase at a flow of 2.0 mL/min and a column temperature of 50.0°C. 3) In 15 min increments, the column was purged with 100% water (10 minutes at 2.0 mL/minute) and then purged with 100% methanol (10 minutes at 2.0 mL/minute). 4) The column was then purged and equilibrated with the mobile phase of step 1 above, and N for acenaphthene was measured. 5) The process was then repeated starting at step 2. Packed columns were kept in a 50°C water bath throughout the test. Column lifetime is defined as the time of exposure to the pH 10 triethylamine solution when the efficiency of the column drops to 50% of its initial value. The results are shown in Table 10.

15 **TABLE 10**

Column	Lifetime (h)
Commercial Column A (C_{30} Type)	17
Example 23j (C_{30} Type)	57
Commercial Column C (C_{18} Type)	18
Commercial Column D (C_{18} Type)	17
Commercial Column E (C_{18} Type)	28
Commercial Column F (C_{18} Type)	23
Commercial Column G (C_{18} Type)	23
Example 23a (C_{18} Type)	51
Example 23c (C_{18} Type)	48
Example 23d (C_{18} Type)	50
Example 24a (C_{18} Type)	36
Example 24h (C_{18} Type)	41
Example 24i (C_{18} Type)	34
Example 24u (C_{18} Type)	>153
Example 24x (C_{18} Type)	41
Commercial Column I (Embedded Polar Type)	29

Example 23f (Embedded Polar Type)	32
Example 23l (Embedded Polar Type)	303
Commercial Column J (C ₈ Type)	18
Commercial Column K (C ₈ Type)	13
Example 23k (C ₈ Type)	26
Commercial Column L (Ph Type)	20
Commercial Column M (Ph Type)	16
Example 23h (Ph Type)	29
Example 24c (Ph Type)	25
Example 24e (Ph Type)	26
Example 24f (Ph Type)	29
Commercial Column O (C ₆ F ₅ Type)	14
Commercial Column P (C ₆ F ₅ Type)	6
Example 23i (C ₆ F ₅ Type)	24
Example 24m (C ₆ F ₅ Type)	18
Commercial Column Q (CN type)	5
Example 24t (CN Type)	9

It is evident that the lifetimes of the columns containing hybrid packing materials are greatly improved over the commercial columns containing silica-based materials.

Incorporation By Reference

- 5 The entire contents of all patents, published patent applications and other references cited herein are hereby expressly incorporated herein in their entireties by reference.

Equivalents

Those skilled in the art will recognize, or be able to ascertain using no more than routine experimentation, numerous equivalents to the specific procedures described herein. Such equivalents were considered to be within the scope of this invention and
5 are covered by the following claims. The contents of all references, issued patents, and published patent applications cited throughout this application are hereby incorporated by reference.

What is claimed is:

1. A porous inorganic/organic hybrid material, comprising porous inorganic/organic hybrid particles having a chromatographically-enhancing pore geometry, wherein said
5 particles have a micropore surface area ranging from less than about 110 m²/g to less than about 50 m²/g.
2. The hybrid material of claim 1, wherein said particles have been surface modified by a surface modifier selected from the group consisting of an organic group surface modifier, a silanol group surface modifier, a polymeric coating surface modifier,
10 and combinations thereof.
3. The hybrid material of claim 2, wherein said particles have been surface modified with a surface modifier having the formula Z_a(R')_bSi-R, where Z = Cl, Br, I, C₁ - C₅ alkoxy, dialkylamino or trifluoromethanesulfonate; a and b are each an integer from 0 to 3 provided that a + b = 3; R' is a C₁ - C₆ straight, cyclic or branched alkyl group,
15 and R is a functionalizing group.
4. The hybrid material of claim 3, wherein the functionalizing group R is selected from the group consisting of alkenyl, alkynyl, ester, and alkyl or aryl group containing an embedded polar functionality.
5. The hybrid material of claim 3, wherein said functionalizing group R is a C₁ -
20 C₃₀ alkyl group.
6. The hybrid material of claim 3, wherein said surface modifier is selected from the group consisting of octyltrichlorosilane and octadecyltrichlorosilane.
7. The hybrid material of claim 2, wherein said particles have been surface modified by a combination of an organic group surface modifier and a silanol group
25 surface modifier.
8. The hybrid material of claim 2, wherein said particles have been surface modified by a combination of an organic group surface modifier and a polymeric coating surface modifier.
9. The hybrid material of claim 2, wherein said particles have been surface
30 modified by a combination of a silanol group surface modifier and a polymeric coating surface modifier.
10. The hybrid material of claim 2, wherein said particles have been surface modified via formation of an organic covalent bond between an organic group of the particle and a surface modifier.

11. The hybrid material of claim 2, wherein said particles have been surface modified by a combination of an organic group surface modifier, a silanol group surface modifier, and a polymeric coating surface modifier.
12. The hybrid material of claim 2, wherein said particles have been surface
5 modified by a silanol group surface modifier.
13. The hybrid material of claim 1, wherein said particles have a micropore surface area of less than about 110 m²/g.
14. The hybrid material of claim 1, wherein said particles have a micropore surface area of less than about 105 m²/g.
- 10 15. The hybrid material of claim 1, wherein said particles have a micropore surface area of less than about 80 m²/g.
16. The hybrid material of claim 1, wherein said particles have a micropore surface area of less than about 50 m²/g.
17. A porous inorganic/organic hybrid material, comprising porous inorganic/organic
15 hybrid particles having a chromatographically-enhancing pore geometry, and having the formula $\text{SiO}_2/(\text{R}^2_p\text{R}^4_q\text{SiO})_n$ or $\text{SiO}_2/[\text{R}^6(\text{R}^2_r\text{SiO})_m]_n$ wherein R² and R⁴ are independently C₁ - C₁₈ aliphatic, styryl, vinyl, propanol, or aromatic moieties, R⁶ is a substituted or unsubstituted C₁ - C₁₈ alkylene, alkenylene, alkynylene or arylene moiety bridging two or more silicon atoms, p and q are 0, 1 or 2, provided that p+q = 1 or 2, and that when
20 p+q=1, t=1.5, and when p+q=2, t=1; r is 0 or 1, provided that when r = 0, t = 1.5, and when r = 1, t = 1; m is an integer greater than or equal to 2, and n is a number from 0.03 to 1.
18. The hybrid material of claim 17, wherein n is a number from 0.1 to 1
19. The hybrid material of claim 17 having average pore diameters of about 100 to
25 300Å.
20. The hybrid material of claim 17, wherein n is a number from 0.2 to 0.5.
21. The hybrid material of claim 17, wherein said particles have a micropore surface area ranging from less than about 110 m²/g to less than about 50 m²/g.
22. A method of preparation of porous inorganic/organic hybrid particles having a
30 chromatographically-enhancing pore geometry, comprising the steps of
- a) forming porous inorganic/organic hybrid particles,
 - b) modifying the pore structure of said porous particles,
- wherein said particles have a micropore surface area ranging from less than about 110 m²/g to less than about 50 m²/g

23. The method of claim 22, wherein said particles have been surface modified by a surface modifier selected from the group consisting of an organic group surface modifier, a silanol group surface modifier, a polymeric coating surface modifier, and combinations thereof.
- 5 24. The method of claim 23, wherein said particles have been surface modified by a polymeric coating surface modifier.
25. The method of claim 23, wherein said particles have been surface modified by a combination of an organic group surface modifier and a silanol group surface modifier.
26. The method of claim 23, wherein said particles have been surface modified by a
10 combination of an organic group surface modifier and a polymeric coating surface modifier.
27. The hybrid material of claim 23, wherein said particles have been surface modified by a combination of a silanol group surface modifier and a polymeric coating surface modifier.
- 15 28. The method of claim 23, wherein said particles have been surface modified by a combination of an organic group surface modifier, a silanol group surface modifier, and a polymeric coating surface modifier.
29. The method of claim 23, wherein said particles have been surface modified by a silanol group surface modifier.
- 20 30. The method of claim 23, wherein said particles have been surface modified via formation of an organic covalent bond between an organic group of the particle and a surface modifier.
31. The method of claim 22 wherein said porous particles are prepared by prepolymerizing one or more organoalkoxysilanes and a tetraalkoxysilane to produce a
25 polyorganoalkoxysiloxane, and preparing an aqueous suspension of said polyorganoalkoxysiloxane, and gelling in the presence of a base catalyst so as to produce said porous particles.
32. The method of claim 22 wherein said porous particles are prepared by prepolymerizing an organotrialkoxysilane and a tetraalkoxysilane to produce a
30 polyalkyloxysiloxane, and preparing an aqueous suspension of said polyalkyloxysiloxane, and gelling in the presence of a base catalyst so as to produce said porous particles.
33. The method of claim 31 or 32 wherein said pore structure of said porous particles is modified by further including a combination of different surfactants in said
35 suspension, and by subjecting said porous particles to hydrothermal treatment.

34. The method of claim 33 wherein the surfactants are selected from the group consisting of Triton X-45, Triton X-100, sodium dodecylsulfate, tris(hydroxymethyl)aminomethane lauryl sulfate, and any combination thereof.

5 35. The method of claim 31 wherein said prepolymerization step comprises hydrolyzing and condensing a mixture of one or more organoalkoxysilanes and a tetraalkoxysilane in the presence of an acid catalyst to produce said polyalkyloxysiloxane.

10 36. A method of preparation of porous inorganic/organic hybrid particles having a chromatographically-enhancing pore geometry, comprising the steps of
a) forming porous inorganic/organic hybrid particles,
b) modifying the pore structure of said porous particles, and
c) surface modifying said particles,

15 wherein said particles have been surface modified by a surface modifier selected from the group consisting of an organic group surface modifier, a silanol group surface modifier, a polymeric coating surface modifier, and combinations thereof.

37. The method of claim 36 wherein said particles have been surface modified by a polymeric coating surface modifier.

38. The method of claim 36, wherein said particles have been surface modified by a combination of an organic group surface modifier and a silanol group surface modifier.

20 39. The method of claim 36, wherein said particles have been surface modified by a combination of an organic group surface modifier and a polymeric coating surface modifier.

25 40. The method of claim 36, wherein said particles have been surface modified by a combination of a silanol group surface modifier and a polymeric coating surface modifier.

41. The method of claim 36, wherein said particles have been surface modified by a combination of an organic group surface modifier, a silanol group surface modifier, and a polymeric coating surface modifier.

30 42. The method of claim 36, wherein said particles have been surface modified by a silanol group surface modifier.

43. The method of claim 36, wherein said particles have been surface modified via formation of an organic covalent bond between an organic group of the particle and a surface modifier.

44. The method of claim 36 wherein said surface modification step includes surface modifying said porous particles with a surface modifier having the formula $Z_a(R')_bSi-R$, where $Z = Cl, Br, I, C_1 - C_5$ alkoxy, dialkylamino or trifluoromethanesulfonate; a and b are each an integer from 0 to 3 provided that $a + b = 3$; R' is a $C_1 - C_6$ straight, cyclic or branched alkyl group, and R is a functionalizing group.
45. The method of claim 44 wherein said functionalizing group R is a $C_1 - C_{30}$ alkyl group.
46. The method of claim 44 wherein said surface modifier is selected from the group consisting of octyltrichlorosilane and octadecyltrichlorosilane,.
47. The method of claim 44, wherein the functionalizing group R is selected from the group consisting of alkenyl, alkynyl, ester, and alkyl or aryl group containing an embedded polar functionality.
48. The method of claim 22 wherein said particles have specific pore volumes of about 0.4 to $1.2 \text{ cm}^3/\text{g}$.
49. The method of claim 22 wherein said particles have a micropore surface area of less than about $110 \text{ m}^2/\text{g}$.
50. The method of claim 31 wherein said organoalkoxysilane has the formula $R^6[Si(OR^1)_3]_m$ where R^1 is a $C_1 - C_4$ alkyl moiety, R^6 is a $C_1 - C_{18}$ alkylene, alkenylene, alkynylene or arylene moiety bridging two or more silicon atoms, and m is an integer greater than or equal to two.
51. The method of claim 31 wherein said organoalkoxysilane has the formula $R^2Si(OR^1)_3$ or $R^6[Si(OR^1)_3]_m$ R^2 is methyl, ethyl, phenyl, vinyl, methacryloxypropyl, or styrylethyl and R^1 is ethyl; or R^6 is a bridging ethylene group, $m = 2$, and R^1 is ethyl or methyl.
52. The method of claim 22 wherein said porous inorganic/organic hybrid particles have the formula $SiO_2/[R^6(R^2_rSiO_t)_m]_n$ wherein R^2 is $C_1 - C_{18}$ aliphatic, styryl, vinyl, propanol, or aromatic moieties, R^6 is a substituted or unsubstituted $C_1 - C_{18}$ alkylene, alkenylene, alkynylene or arylene moiety bridging two or more silicon atoms, $t=1$; r is 0 or 1, provided that when $r = 0$, $t = 1.5$, and when $r = 1$, $t = 1$; m is an integer greater than or equal to 2, and n is a number from 0.03 to 1.
53. The method of claim 52, wherein n is a number from 0.1 to 1
54. The method of claim 52 wherein said porous inorganic/organic hybrid particles have average pore diameters of about 100 to 300\AA .
55. The method of claim 52 wherein n is a number from 0.2 to 0.5.

56. A separations device having a stationary phase comprising porous inorganic/organic hybrid particles having a chromatographically-enhancing pore geometry, wherein said particles have a micropore surface ranging from less than about 110 m²/g to less than about 50 m²/g.
57. The separations device of claim 56, wherein said particles have been surface modified by a surface modifier selected from the group consisting of an organic group surface modifier, a silanol group surface modifier, a polymeric coating surface modifier, and combinations thereof.
58. The separations device of claim 56, wherein said device is a thin layer plate.
59. The separations device of claim 56, wherein said particles have a micropore surface area of less than about 105 m²/g.
60. The separations device of claim 56, wherein said particles have a micropore surface area of less than about 80 m²/g.
61. The separations device of claim 56, wherein said particles have a micropore surface area of less than about 50 m²/g.
62. A separations device having a stationary phase comprising porous inorganic/organic hybrid particles having a chromatographically-enhancing pore geometry, wherein the particles have been surface modified with a surface modifier having the formula $Z_a(R')_bSi-R$, where $Z = Cl, Br, I, C_1 - C_5$ alkoxy, dialkylamino or trifluoromethanesulfonate; a and b are each an integer from 0 to 3 provided that $a + b = 3$; R' is a $C_1 - C_6$ straight, cyclic or branched alkyl group, and R is a functionalizing group, wherein said particles have a micropore surface area ranging from less than about 110 m²/g to less than about 50 m²/g.
63. The separations device of claim 62, wherein said surface modifier is selected from the group consisting of octyltrichlorosilane and octadecyltrichlorosilane.
64. The separations device of claim 62, wherein the functionalizing group R is selected from the group consisting of alkenyl, alkynyl, ester, and alkyl or aryl group containing an embedded polar functionality.
65. The separations device of claim 62, wherein said functionalizing group R is a $C_1 - C_{30}$ alkyl group.
66. The separations device of claim 56, wherein said hybrid particles have the formula $SiO_2/(R^2_p R^4_q SiO_t)_n$ or $SiO_2/[R^6(R^2_r SiO_t)_m]_n$ wherein R^2 and R^4 are independently $C_1 - C_{18}$ aliphatic, styryl, vinyl, propanol, or aromatic moieties, R^6 is a substituted or unsubstituted $C_1 - C_{18}$ alkylene, alkenylene, alkynylene or arylene moiety bridging two or more silicon atoms, p and q are 0, 1 or 2, provided that $p+q = 1$ or 2, and that when

$p+q=1$, $t=1.5$, and when $p+q=2$, $t=1$; r is 0 or 1, provided that when $r=0$, $t=1.5$, and when $r=1$, $t=1$; m is an integer greater than or equal to 2, and n is a number from 0.03 to 1.

67. The separations device of claim 66, wherein n is a number from 0.1 to 1.

5 68. The separations device of claim 66, wherein said hybrid particles have average pore diameters of about 100 to 300 Å.

69. The method of claim 66 wherein n is a number from 0.2 to 0.5.

70. A chromatographic column having improved lifetime, comprising

- 10 a) a column having a cylindrical interior for accepting a packing material, and
b) a packed chromatographic bed comprising porous inorganic/organic hybrid particles having a chromatographically-enhancing pore geometry of the formula $\text{SiO}_2/(\text{R}^2_p\text{R}^4_q\text{SiO}_t)_n$ or $\text{SiO}_2/[\text{R}^6(\text{R}^2_r\text{SiO}_t)_m]_n$ wherein R^2 and R^4 are independently $\text{C}_1 - \text{C}_{18}$ aliphatic, styryl, vinyl, propanol, or aromatic moieties, R^6 is a substituted or unsubstituted $\text{C}_1 - \text{C}_{18}$ alkylene, alkenylene, 15 alkynylene or arylene moiety bridging two or more silicon atoms, p and q are 0, 1 or 2, provided that $p+q=1$ or 2, and that when $p+q=1$, $t=1.5$, and when $p+q=2$, $t=1$; r is 0 or 1, provided that when $r=0$, $t=1.5$, and when $r=1$, $t=1$; m is an integer greater than or equal to 2, and n is a number from 0.03 to 1, said porous hybrid silica chromatographic matrix having a 20 chromatographically-enhancing pore geometry and average pore diameters of about 100 to 300 Å, and said porous particles of hybrid silica have been surface modified.

71. The chromatographic column of claim 70, wherein n is a number from 0.1 to 1.

72. A chromatographic column having improved lifetime, comprising

- 25 a) a column having a cylindrical interior for accepting a packing material, and
b) a packed chromatographic bed comprising porous inorganic/organic hybrid particles having a chromatographically-enhancing pore geometry wherein said particles have been surface modified by a surface modifier selected from the group consisting of an organic group surface modifier, a silanol group 30 surface modifier, a polymeric coating surface modifier, and combinations thereof.

73. The chromatographic column of claim 72 wherein said surface modification step includes surface modifying said porous particles with a surface modifier having the formula $\text{Z}_a(\text{R}')_b\text{Si-R}$, where $\text{Z} = \text{Cl}, \text{Br}, \text{I}, \text{C}_1 - \text{C}_5$ alkoxy, dialkylamino or 35 trifluoromethanesulfonate; a and b are each an integer from 0 to 3 provided that $a + b =$

3; R' is a C₁ - C₆ straight, cyclic or branched alkyl group, and R is a functionalizing group.

74. A method of preparation of porous particles of hybrid silica having a chromatographically-enhancing pore geometry, comprising the steps of

- 5 a) prepolymerizing a mixture of one or more organoalkoxysilanes and a tetraalkoxysilane in the presence of an acid catalyst to produce a polyorganoalkoxysiloxane;
- b) preparing an aqueous suspension of said polyorganoalkoxysiloxane, said suspension further comprising a surfactant or combination of surfactants, and gelling in the presence of a base catalyst so as to produce porous particles; and
- 10 c) modifying the pore structure of said porous particles by hydrothermal treatment,

thereby preparing porous particles of hybrid silica having a chromatographically-enhancing pore geometry.

75. The method of claim 74 wherein the molar ratio of said organoalkoxysilane and polyorganoalkoxysiloxane is from about 0.5:1 to 0.2:1.

76. The method of claim 74 wherein said particles have a specific surface area of about 75 to 600m²/g.

20 77. The method of claim 74 wherein said particles have a specific surface area of about 100 to 350m²/g.

78. The method of claim 74 wherein said particles have a micropore surface area of less than about 110 m²/g.

25 79. The method of claim 74 wherein said particles have specific pore volumes of about 0.4 to 1.2 cm³/g.

80. The method of claim 74 , wherein said particles have a micropore surface area of less than about 105 m²/g.

81. The method of claim 74 , wherein said particles have a micropore surface area of less than about 80 m²/g.

30 82. The method of claim 74 , wherein said particles have a micropore surface area of less than about 50 m²/g.

83. The method of claim 74 wherein said particles have an average pore diameter of about 50 to 500Å.

84. The method of claim 74 wherein said particles have an average pore diameter of about 100 to 300Å.
85. The method of claim 74 wherein said surfactant is an alkylphenoxypolyethoxyethanol.
- 5 86. The method of claim 74 wherein said suspension further comprises a porogen.
87. The method of claim 74 wherein said tetraalkoxysilane is selected from the group consisting of tetramethoxysilane and tetraethoxysilane.
88. The method of claim 74, wherein said hybrid silica particles have the formula $\text{SiO}_2/(\text{R}^2_p\text{R}^4_q\text{SiO}_t)_n$ or $\text{SiO}_2/[\text{R}^6(\text{R}^2_r\text{SiO}_t)_m]_n$ wherein R^2 and R^4 are independently C_1 - C_{18} aliphatic, styryl, vinyl, propanol, or aromatic moieties, R^6 is a substituted or
10 C_1 - C_{18} alkylene, alkenylene, alkynylene or arylene moiety bridging two or more silicon atoms, p and q are 0, 1 or 2, provided that $p+q = 1$ or 2, and that when $p+q=1$, $t=1.5$, and when $p+q=2$, $t=1$; r is 0 or 1, provided that when $r = 0$, $t = 1.5$, and when $r = 1$, $t = 1$; m is an integer greater than or equal to 2, and n is a number from 0.03
15 to 1.
89. The method of claim 88, wherein n is a number from 0.1 to 1.
90. The method of claim 88, wherein said hybrid silica particles have average pore diameters of about 100 to 300Å.
91. The method of claim 88 wherein n is a number from 0.2 to 0.5.
- 20 92. Porous particles of hybrid silica having a chromatographically-enhancing pore geometry, produced by the process of
- a) prepolymerizing a mixture of one or more organoalkoxysilanes and a tetraalkoxysilane in the presence of an acid catalyst to produce a polyalkyloxysiloxane;
 - 25 b) preparing an aqueous suspension of said polyalkyloxysiloxane, said suspension further comprising a surfactant or a combination of surfactants, and gelling in the presence of a base catalyst so as to produce porous particles; and
 - c) modifying the pore structure of said porous particles by hydrothermal
30 treatment,
- thereby producing porous particles of hybrid silica having a chromatographically-enhancing pore geometry.
93. The porous hybrid silica particles of claim 92 wherein the molar ratio of said organoalkoxysilane and tetraalkoxysilane is from about 0.5:1 to 0.2:1.

94. The porous hybrid silica particles of claim 92 wherein said particles have a specific surface area of about 75 to 600 m²/g.
95. The porous hybrid silica particles of claim 92 wherein said particles have a specific surface area of about 100 to 350 m²/g.
- 5 96. The porous hybrid silica particles of claim 92 wherein said particles have a micropore surface area of less than about 110 m²/g.
97. The porous hybrid silica particles of claim 92 wherein said particles have specific pore volumes of about 0.4 to 1.2 cm³/g.
98. The porous hybrid silica particles of claim 92, wherein said particles have a ,
10 micropore surface area of less than about 105 m²/g.
99. The porous hybrid silica particles of claim 92, wherein said particles have a micropore surface area of less than about 80 m²/g.
100. The porous hybrid silica particles of claim 92, wherein said particles have a micropore surface area of less than about 50 m²/g.
- 15 101. The porous hybrid silica particles of claim 92 wherein said particles have an average pore diameter of about 50 to 500 Å.
102. The porous hybrid silica particles of claim 92 wherein said particles have an average pore diameter of about 100 to 300 Å.
103. The porous hybrid silica particles of claim 92 wherein said surfactant is an
20 alkylphenoxypolyethoxyethanol.
104. The porous hybrid silica particles of claim 92 wherein said suspension further comprises a porogen.
105. The porous hybrid silica particles of claim 92 wherein said tetraalkoxysilane is selected from the group consisting of tetramethoxysilane and tetraethoxysilane.
- 25 106. The porous hybrid silica particles of claim 92, having the formula $\text{SiO}_2/(\text{R}^2_p\text{R}^4_q\text{SiO}_t)_n$ or $\text{SiO}_2/[\text{R}^6(\text{R}^2_r\text{SiO}_t)_m]_n$ wherein R^2 and R^4 are independently C_1 - C_{18} aliphatic, styryl, vinyl, propanol, or aromatic moieties, R^6 is a substituted or unsubstituted C_1 - C_{18} alkylene, alkenylene, alkynylene or arylene moiety bridging two or more silicon atoms, p and q are 0, 1 or 2, provided that $p+q = 1$ or 2, and that when
30 $p+q=1$, $t=1.5$, and when $p+q=2$, $t=1$; r is 0 or 1, provided that when $r = 0$, $t = 1.5$, and when $r = 1$, $t = 1$; m is an integer greater than or equal to 2, and n is a number from 0.03 to 1.
107. The porous hybrid silica particles of claim 106, wherein said hybrid silica particles have average pore diameters of about 100 to 300 Å.

108. The porous hybrid silica particles of claim 106 wherein n is a number from 0.2 to 0.5.
109. The porous hybrid silica particles of claim 106, wherein n is a number from 0.1 to 1.
- 5 110. The hybrid material of claim 1, wherein said particles have a specific pore volumes of about 0.4 to 1.2 cm³/g.
111. A porous inorganic/organic hybrid material, comprising a chromatographically-enhancing pore geometry.
112. A porous inorganic/organic hybrid material, wherein pores of a diameter of less
10 than about 34Å contribute less than about 110 m²/g to less than about 50 m²/g to the specific surface area of the material.
113. The hybrid material of claim 111, wherein pores of a diameter ranging from about 35 Å to about 500 Å contribute about 35 m²/g to about 750 m²/g to the specific surface area of the material.
- 15 114. The hybrid material of claim 113, wherein pores of a diameter ranging from about 60 Å to about 500 Å contribute about 65 m²/g to about 550 m²/g to the specific surface area of the material.
115. The hybrid material of claim 114, wherein pores of a diameter ranging from about 100 Å to about 300 Å contribute about 100 m²/g to about 350 m²/g to the specific
20 surface area of the material.

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US02/25250

A. CLASSIFICATION OF SUBJECT MATTER

IPC(6) : B01D 15/08; B05D 7/00; B32B 5/16
US CL : 210/268, 656, 661, 792; 427/220, 222; 428/402, 403, 407

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
U.S. : 210/268, 656, 661, 792; 427/220, 222; 428/402, 403, 407

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)
WEST

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X,P	US 6,395,341 B1 (ARAKAWA et al) 28 May 2002 (28.05.2002), entire document.	1-115
X,E	US 6,476,098 B1 (ARAKAWA et al) 05 November 2002 (05.11.2002), entire document.	1-115
A	US 5,637,135 A (OTTENSTEIN et al) 10 June 1997 (10.06.1997), entire document.	1-115
A	US 6,271,292 B1 (MAGER et al) 07 August 2001 (07.08.2001), entire document.	1-115
A,P	US 6,313,219 B1 (TAYLOR-SMITH) 06 November 2001 (06.11.2001), entire document.	1-115
A,E	US 6,465,387 B1 (PINNAVAIA et al) 15 October 2002 (15.10.2002), entire document.	1-115

☐ Further documents are listed in the continuation of Box C.

☐ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance
"E" earlier application or patent published on or after the international filing date
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
"O" document referring to an oral disclosure, use, exhibition or other means
"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"&" document member of the same patent family

Date of the actual completion of the international search

10 December 2002 (10.12.2002)

Date of mailing of the international search report

30 DEC 2002

Name and mailing address of the ISA/US
Commissioner of Patents and Trademarks
Box PCT
Washington, D.C. 20231

Facsimile No. (703)305-3230

Authorized officer

Paul Thibodeau

Telephone No. 703-308-2415

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US02/25250

Box I Observations where certain claims were found unsearchable (Continuation of Item 1 of first sheet)

This international report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claim Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☐ Claim Nos.:
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:
3. ☐ Claim Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box II Observations where unity of invention is lacking (Continuation of Item 2 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:
Please See Continuation Sheet

1. ☐ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2. ☒ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

☐
☐

- The additional search fees were accompanied by the applicant's protest.
No protest accompanied the payment of additional search fees.

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US02/25250

BOX II. OBSERVATIONS WHERE UNITY OF INVENTION IS LACKING This application contains the following inventions or groups of inventions which are not so linked as to form a single general inventive concept under PCT Rule 13.1. In order for all inventions to be examined, the appropriate additional examination fees must be paid.

Group I, claim(s) 1, 13-21, 22, 32, 34, 48, 49, 52-55, 56, 58-61, 66-69, 74-91, and 92-115, drawn to an uncoated porous material and method of making thereof.

Group II, claim(s) 2-12, 23-31, 33-47, 50, 51, 57, 62-65, and 70-73, drawn to a coated porous material and method of making thereof.

The inventions listed as Groups I and II do not relate to a single general inventive concept under PCT Rule 13.1 because, under PCT Rule 13.2, they lack the same or corresponding special technical features for the following reasons: the coating material and the coating method required in the invention of Group II corresponding to a special technical feature, i.e. concepts of functionalizing and coating a surface which is absent in the invention of group I.